т	۵	п	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65°C to +175°C		
-Salt Spray	: 2000 hours		

: 24.5 g ± 10%

8D 0

G

15

J

15

В

F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.39±0.2		
R1	24.61		
R2	23.01		
S	31±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M22x1-6g		


ORIENTATION : D

CONTACT LAYOUT : 15-15

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

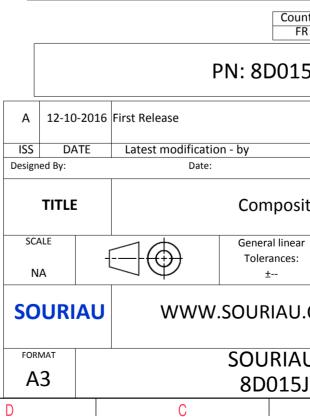

	Φ		A			
		I				
					4	
					3	
S EXA	MPLE				0	
whic er of th	non-conformit h does not co he Parties or b n, technical n	mply with by a third part	τ γ			
intry R	Jurisdiction & Control List Not Listed					
.5J1	J15BD					
				MOD N°		
		CUSTOMER	R DRAWING			
ite l	e Receptacle 8D series					
ar	NPRDS / PROJECT 859					
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
				SHEET		
0172	BD-C		A	1/2	J	

r	т	۵	г	m	D	0	
		Contact Layout					Panel Cutout
4		$ \begin{array}{c} & & & & & \\ & & & & & \\ & & $			A	SQUARE FLANGE RECEPTACLE (TYP) REAR MOUNTING	E 0)
	B + 202 (5.13) C + 244 (6.20) D + 218 (5.54) E + 126 (3.20) F + 000 (00) G - 126 (3.20) H - 218 (5.54)	(Insert arrangement 15-15) tion Location Y-axis Y-axis Y-axis (mm) position ID (mm) (mm) +225 (5.72) J -244 (6.20) +014 (0.36) +.140 (3.56) K -202 (5.13) +140 (3.56) 113 (2.87) M +000 (0.00) +140 (3.56) 208 (5.31) N +110 (2.79) +040 (1.02) 245 (6.22) P +000 (0.00) -077 (1.96) 208 (5.31) R -110 (2.79) +040 (1.02) 113 (2.87) 113 (2.87) 113 (2.87)	1		₩ -		ØA_
ى	45 45	tacts contacts rating location 1 16 P MS20052-15 14 20 I All other MS20052-15					Dim ØA ØAA R1 ØT
	-					the Specifications iss	the Products whi
N							Country FR
					A 12-10-201 ISS DATE Designed By:	.6 First Release Latest modification - Date:	by
→					SCALE NA		Composite General linear Tolerances: ±
					SOURIAU		OURIAU.CO
			-		FORMAT A3		SOURIAU 8D015J1
	Н	G	l F	E	D	С	

