
T D			0	□ >	
A Z					
			LAYOUT SHOWN AS EXAMPL	E	
	Keying Shown as example				
CHARACTERISTICS	Connector dimension Dim Nominal				
 -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum 	ØS41.7 MaxZ31 MaxVV THREADM31x1-6g		SOURIAU shall not be liable for any non- due to a use of the Products which do the Specifications issued by either of the Pa (professional recommendation, te Country FR	es not comply with arties or by a third party	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D521Z42	BE	
-Temperature Range -65°C to +175°C		A 12-10-2016 F	irst Release		
-Salt Spray : 500 hours		ISS DATE	Latest modification - by		MOD N°
		Designed By:	Date:	CUSTOMER DRAWING	
BASIC SERIES: 8D 5 - 21 Z	42 B E	SCALE	General linear	Plug 8D series	
→ SHELL TYPE : Plug with RFI Shielding		NA	Tolerances:	859	
CONTACT TYPE : Standard Crimp Contact	ORIENTATION : CONTACT TYPE : SOCKET(500 Mating	- SUURIAU	WWW.SOURIAU.COM	This document is the pro SOURIAU it must not be reproduc communicated without pe	ced or
SHELL SIZE : 21		<u> </u>			
SHELL SIZE : 21 PLATING : Z = Black Zinc Nickel	CONTACT LAYOUT : 21-4	42 FORMAT A3	SOURIAU DR	G N°	SHEET

	т		Q		т	т		0	
4		4	ct Layout						
		Ctc A	0 6.	γ 19 .19					
ယ									
	F							the Specifications i	of the Products wh issued by either o mal recommendat
23								Р	Countr FR N: 8D5212
							A 12-10-201 ISS DATE Designed By:	.6 First Release Latest modification Date:	1 - by
1							SCALE NA		Alumin General linear Tolerances: ±
							SOURIAL		SOURIAU.C
	Н		G		F	 E	A3	С	SOURIAU 8D521Z4

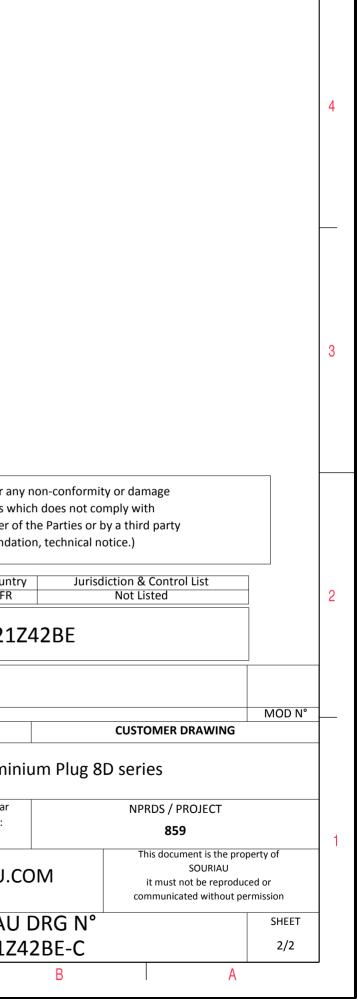

 \triangleright

σ