## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 24VAC/DC WH/GN/YE/RD



i

Part No.:	698.340.75	
Series:	Kompakt 37	
MECHAN	IICAL DATA	
Height		209 mm
Diameter		38 mm
Materials		PC
Dome colour		Clear
Housing colour		Silver
Protection category		IP65
Connection		Cable
cross-sectional area maximum		0,34mm² / 22AWG
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Cable length		2000 mm
Tension relief		Pull-out protection
Type of fixing		Built-in mounting
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		236 g
Product weight		195 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		AC/DC
Operating voltage frequency		50Hz
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		135 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3 In the connection area: 2
OPTICAL	DATA	
Light source		LED
Light colour		Green Red White Yellow
Optical signal image		Permanent
Service life optical		50,000 h maximum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i


## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 24VAC/DC WH/GN/YE/RD

APPROVAL DATA			
Conforms with CE	Yes		
WEEE	Yes		
Conforms with ATEX-directive	No		
Conforms with CCC	No		
Conforms with UL	CULus		
UL Type Rating	Туре 12 Туре 4Х		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	Yes		
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)		
Conforms with AS-I	No		
ICAO Certification	No		
Conforms with DNV	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM 24VAC/DC WH/GN/YE/RD

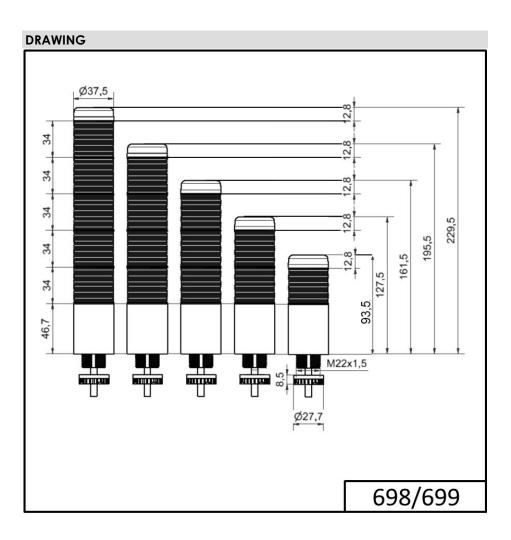

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.