



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/07/03	A	.945 WAS .994 .570 WAS .624	T.B.	B.S.	
2/17/07	B	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
8/06/14	C	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
6/02/17	D	DIM. 0.122 WAS 0.125 DIM. 0.157 WAS 0.150	T.B.	B.S.	

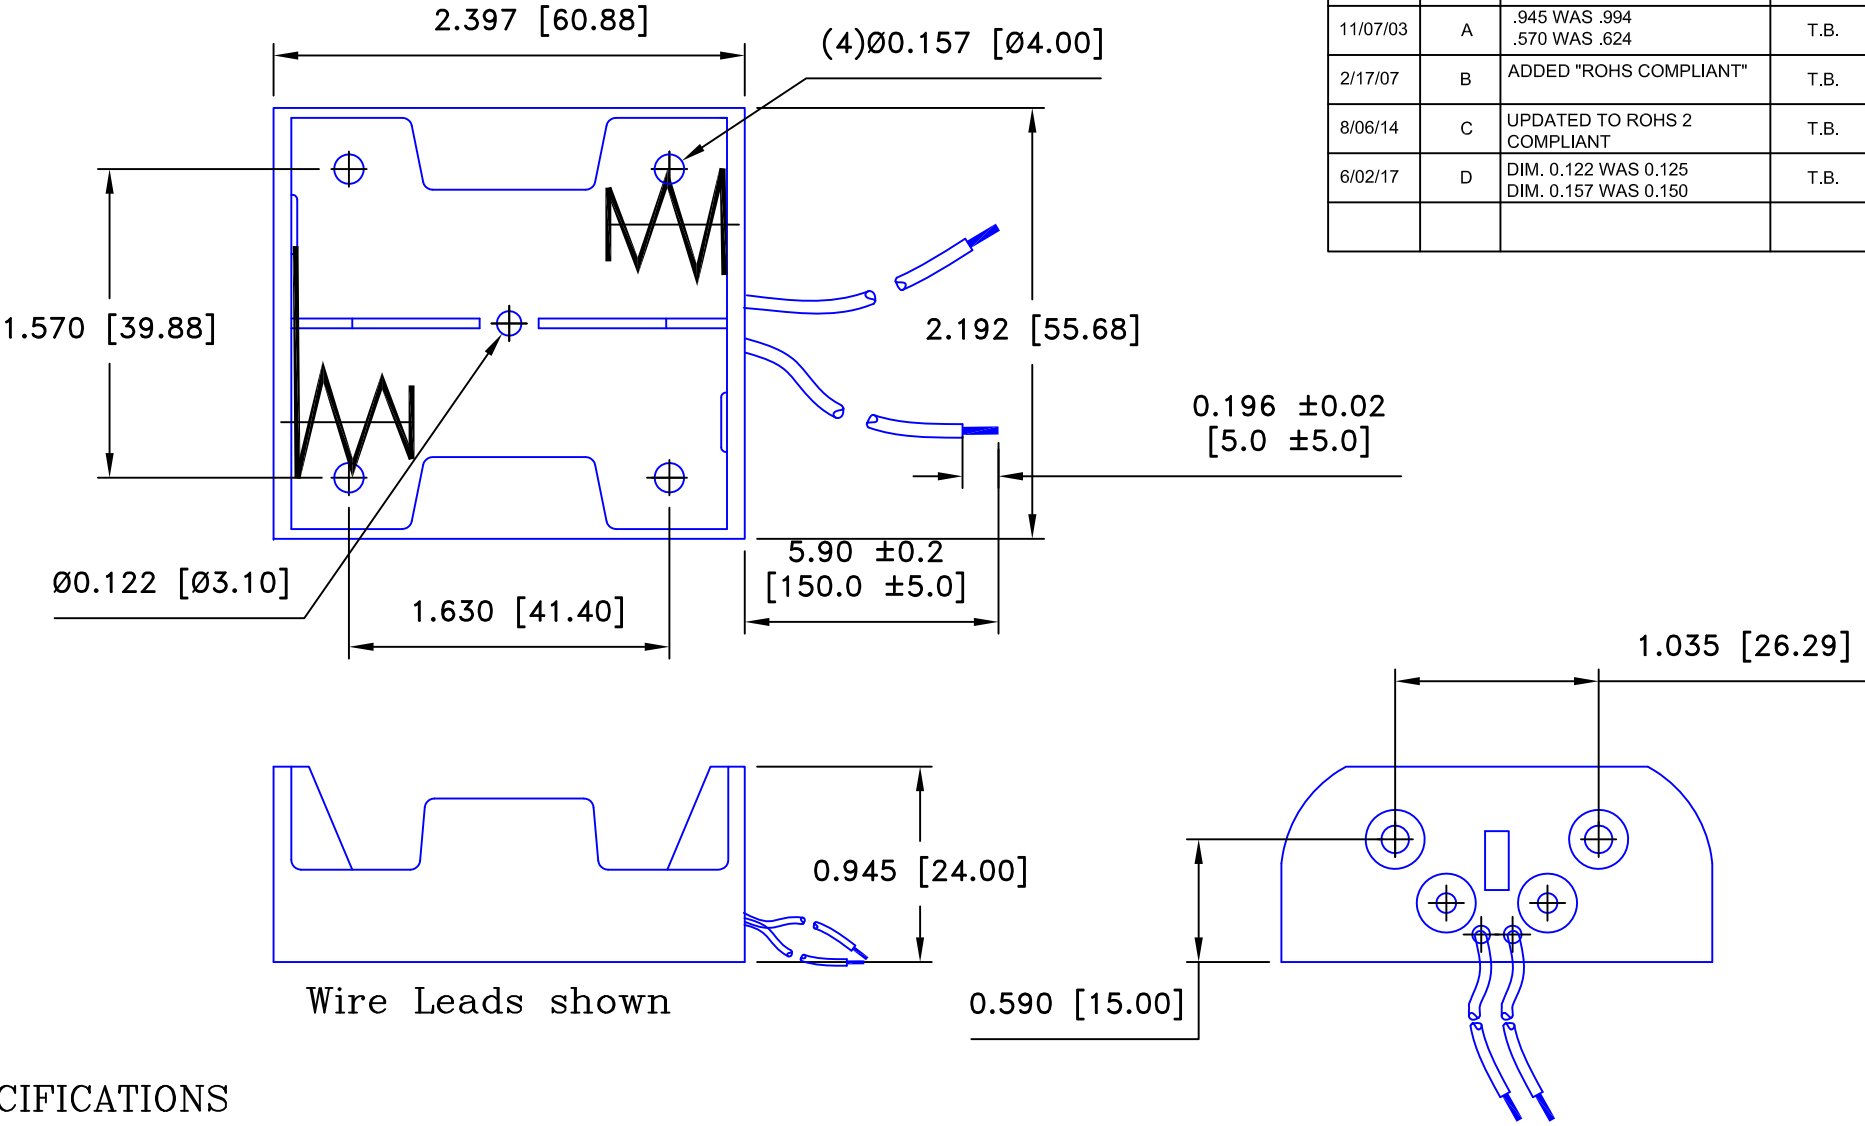

SPECIFICATIONS

Plastic material - Polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA, TR64, 300V, 80°C
 Rivets - Brass, Nickel Plated
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER
 EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale 1=1	Drawn By T.S. Approved By T.B.
Fractional ± .8 (.030)	Title TWO "C" CELL HOLDER WITH 6" WIRE LEADS		
Angular ± 3°	Date 6/02/17	Drawing Number BH2CW	