

PC 200/125 XHG



Sample image

Order symbol: PC 200/125 XHG

Product nbr: 6013327

UL Code: 6413327

UL Name: UL PC 200/125 XHG

Description: Enclosure. PC


Remarks: Opaque cover

Including: Base with PUR gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

EAN: 6418074021939

El. number:

- Finland: 3421685
- Denmark: 8212022616
- Sweden: 6013327

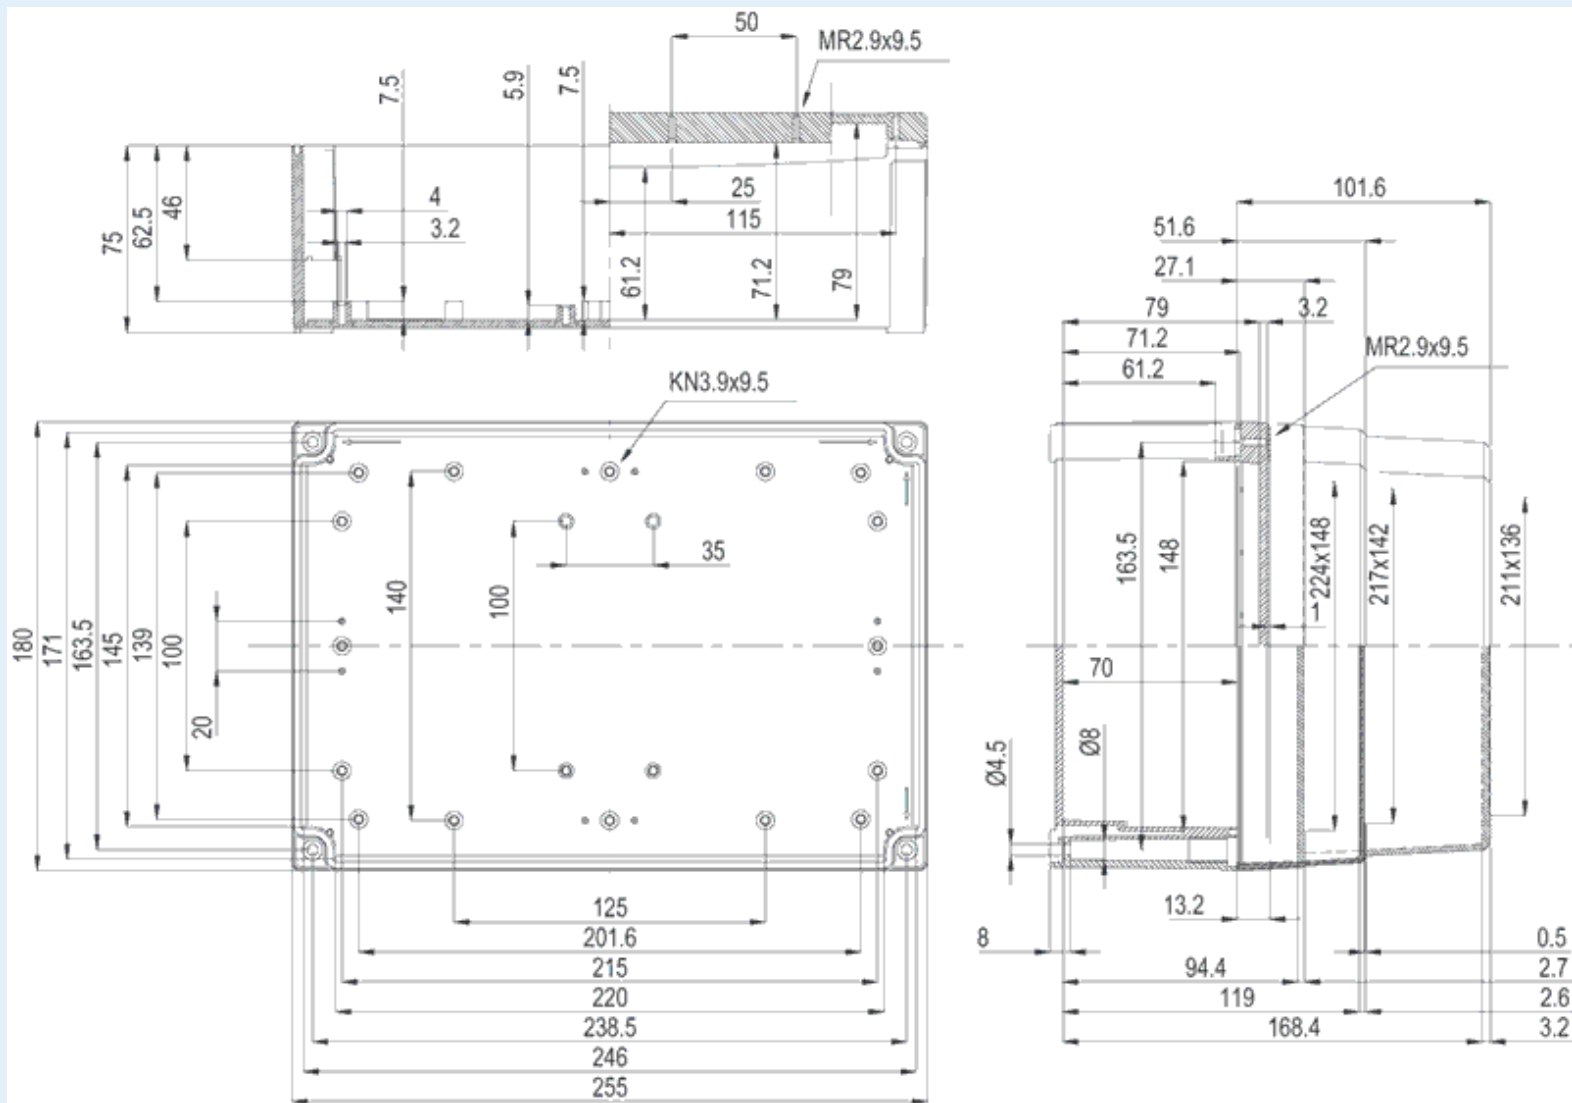

Dimensions: **Height** **Width** **Depth**

mm: 255 180 125

inch:

Materials:

Material: Polycarbonate
 Base colour: RAL 7035 -light grey
 Cover colour: RAL 7035 -light grey
 Gasket material: Polyurethane

Temperatures:

Temperature °C (short term):: -40 ... 120
 Temperature °C (continuous): -40 ... 80
 Temperature °F (short term): -40 ... 250
 Temperature °F (continuous): -40 ... 175

Accessories:

- MIN 20 DIN-15 Mounting rail. for enclosures: (225 x 15 x 1)
- HFP 180 Front panel hinge series
- MIN 15 DIN-15 Mounting rail. for enclosures: (150 x 15 x 1)
- MIV 200 Back Panel (Galvanized steel). for enclosures: (223 x 148 x 1)
- FP A 200/180 Front panel (Aluminum). for enclosures: (237 x 170 x 1)
- MIV 15 DIN-35 Mounting rail. for enclosures: (150 x 35 x 1)
- FP 22046 Mounting foot kit (4 pcs)
- MIV 20 DIN-35 Mounting rail. for enclosures: (225 x 35 x 1)

Rating:

Ingress protection (EN 60529): IP66; IP67;
 Impact Resistance (EN 62262): IK08;
 Electrical insulation: Totally insulated
 Halogen free (DIN/VDE 0472, Part 815): 1
 UV resistance: UL 508

Flammability Rating: UL 746C 5"

Glow Wire Test (IEC 695-2-1) °C: 960 °C

NEMA Class

Certificates:

Certificate FI 40847