

NOTES:

MATERIAL:	
HOUSING:	
SHELL:	
CONTACT:	

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE:


.XX ±0.13

.XXX ±0.05


POWER/CO-AX CONTACT RATING:40A (CURRENT)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE:10mΩ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min. 1000V AC rms

-55°C ~ 125°C



COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/2019		
		CHECKED:	DATE:		
EDAG INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
		DRAWING NUMBER: 630-5W5	-240-4N2	ISSUE	
		PART NUMBER: 630-5W5	-240-4N2	1	

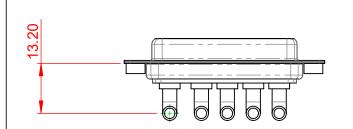



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

