



### Electrical specifications

**Center Frequency:** 779 MHz  
**Bandwidth:** F0 +/- 9MHz  
**Input / Output Impedance:** 50 Ohms  
**Insertion Loss:** 2.0 dB max  
**Ripple in BW:** 0.7 dB max  
**VSWR:** 1.5 : 1  
**Rejection:** 50dB min at 1077.2 - 1095.2MHz  
**Power Handling:** 2 W

### Mechanical


**Mounting Method:** SMT  
**Dimensions:** 17 x 13 x 5.5 mm

### Environmental

**Operating Temperature:** -20 C to +70 C  
**Storage Temperature:** -50 C to +90 C

This product is RoHS compliant.

### Outline Drawing:

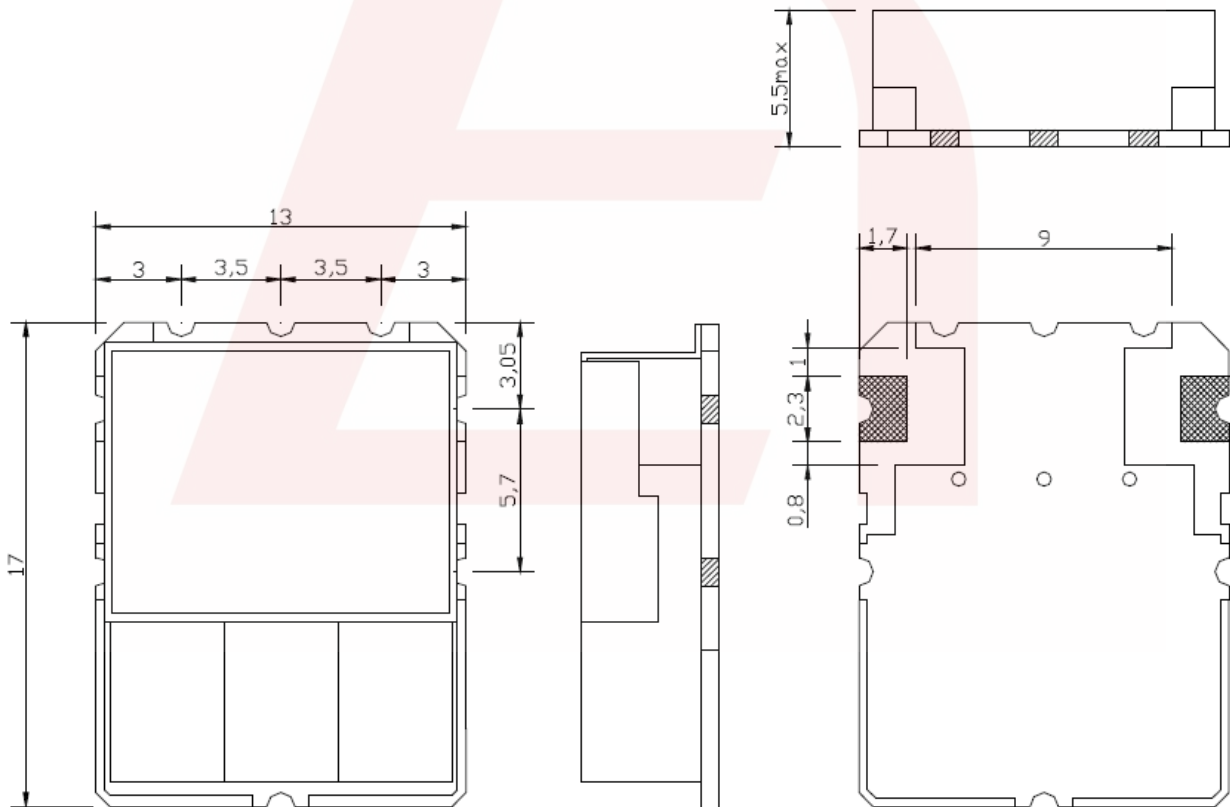

UNIT:mm

TOLERANCE:±0.3