

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

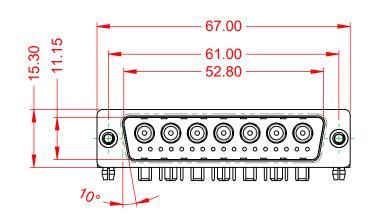



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

OPERATING TEMPERATURE:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED

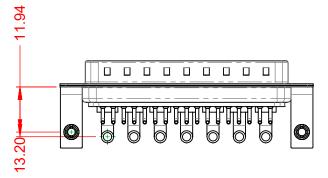

POWER/0 (IF PRES	CO-AX CONTAC ENT)	CT RATING:	30A (CURRENT)
	CONTACT CUR		5A PER CONTACT 10mΩ MAX.
INSULAT	OR RESISTAN	CE:	5000MΩ min.

.X ±0.25 .XX ±0.13 .XXX ±0.05



			SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBINATION	COMBINATION D-SUB			19		
			DATE:			
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
TORONTO, ONTARIO CANADA	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-24W	7640-3TB	ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-24W	7640-3TB	1		

-55°C ~ 125°C

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



