



(1)

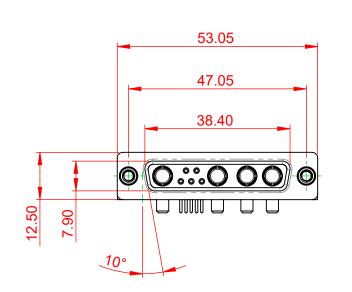



## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT: DPERATING TEMPERATURE: HOWER/CO-AX CONTACT RATING: HOWER/CO-AX CONTACT RATING HOWER/CO-AX CONTACT RATING HOWER/CO-AX CONTACT RATING HOWER/CO-AX CONTACT HOWER/CO-AX CO-AX CONTACT HOWER/CO-AX CO-AX CO-AX CO-AX CO-AX CO-AX CO-AX CO-AX CO-AX


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mΩ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:


.XX ±0.13

.XXX ±0.05





	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
CO			DRAWN: C.B		DATE: JAN. 01/2019	
		CHECKED:		DATE:		
	EDAC INC TORONTO, ONTARIO CANADA O QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)		SHEET 1 OF	2
			DRAWING NUMBER: 630-9W4-2		240-3T6	ISSUE
YOUR CONNECTION TO QUAL			PART NUMBER: 63	80-9W4-	240-3T6	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

