

—	D D	нт – – – – – – – – – – – – – – – – – – –	m	O





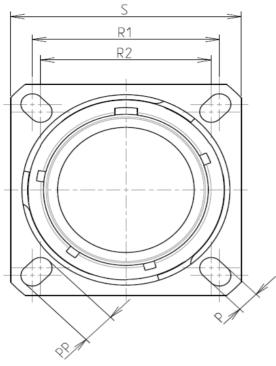

CHARACTERIST

4

ω

 \sim

_

т G т	m		
	S R1 R2 V V V V V V V V V V V V V V V V V V		4
	nown as example		
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C -Salt Spray : 500 hours	Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 26.97 R2 24.61 S 33.3±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max VV THREAD M25x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) <u>Country</u> Jurisdiction & Control List <u>FR</u> Not Listed <u>B</u> 11-04-17 Drawing Update ISS DATE	2 OD N°
BASIC SERIES: 8D 0 - 17 S 22 S N SHELL TYPE : Square Flange Receptacle	ORIENTATION : N CONTACT TYPE : SOCKET(500 Matings) CONTACT LAYOUT : 17-22	Designed By: Date: CUSTOMER DRAWING TITLE Stainless Steel Receptacle 8D series SCALE General linear NA Tolerances: ± 859 This document is the property of SOURIAU source of communicated without permission 22 FORMAT	1

ſ	т	D		П	m		D		C	
4		Contact Layout 22						5Q	VARE FLANGE RECEPTACLE (TYPE O)	anel Cut
	Ctc	2#12 2#8 Triax 17-22 X Y						Ľ	Max. thickness panel for receptacle: Typ	⊘⊺ be 0: front m
ى	A B C D	0 4.57 6.32 0 0 -4.57 -6.32 0							Dim ØA ØAA R1 ØT	
	-								SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts v oy either
N									PN: 8	Coun FR D017
							B ISS Design		Drawing Update Latest modification - by Date:	
<u> </u>							SC/		{ - -(-⊕-) Tole	ral linear erances: ±
	Н	G		F	E		FOR A		SOL	RIAU. JRIAU 0179
	П	I G	I	Г		\vee	/ U	I	U	1

