
			0	B	
ØS-					
			LAYOUT SHOWN AS EXAM		
			LAYOUT SHOWN AS EXAM	VIPLE	
	Keying Shown as example				
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal				
-Standard : Based on MIL-DTL-38999 Series III	ØS 25 Max		SOURIAU shall not be liable for any n	on conformity or domage	
-Shell Plating : Nickel	Z 31 Max VV THREAD M15x1-6g		due to a use of the Products which	n does not comply with	
-Insulator : Thermoplastic			the Specifications issued by either of th (professional recommendatior		
-Contacts : Copper Alloy					
-Seals & Grommet : Silicon Elastomer			Country	Jurisdiction & Control List	
-Contact Plating : Gold over copper Alloy 0.8μm minimum			FR	Not Listed]
-Durability : 500 Mating cycles -Delivered without Souriau contacts			PN: 8D511F0	1PEL	
			1		
-Temperature Range : -65°C to +200°C -Salt Spray : 48 hours		A 15-10-2016	First Release		
- Mass : 14.32 g ± 10%		ISS DATE	Latest modification - by		MOD N°
		Designed By:	Date:	CUSTOMER DRAWING	
		TITLE	TITLE Aluminium Plug 8D series		
BASIC SERIES: 8D 5 - 11 F	01 P E L	SCALE	General linear	NPRDS / PROJECT	
SHELL TYPE : Plug with RFI Shielding	Delivered W/O Cont	tacts NA	Tolerances:	859	
CONTACT TYPE : Standard Crimp Contact	ORIENTATIO			This document is the pro	perty of
		- SOURIAU	WWW.SOURIAU.CO	it mast not be reprodut	
SHELL SIZE : 11	CONTACT TYPE : PIN(500 Mati			communicated without pe	
	CONTACT LAYOUT : 1		SOURIAU E	NKG N [×]	SHEET
PLATING : F = Nickel		A3	8D511F01		1/2

-	Ŧ	G	г – – –	m	Ū	0
		Contact Layout				
4		01				
	(1#12				
	Ctc A	11-01 X Y 0 0				
ω						
	-					
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D511F
					A 15-10-20 ISS DATE	016 First Release
					Designed By:	Date: Alumin
-					SCALE NA	General linear Tolerances: ±
					FORMAT	U WWW.SOURIAU.C SOURIAU
	Ц	<u> </u>	F	E	A3	8D511F0
	Н	G		I E \	D	C

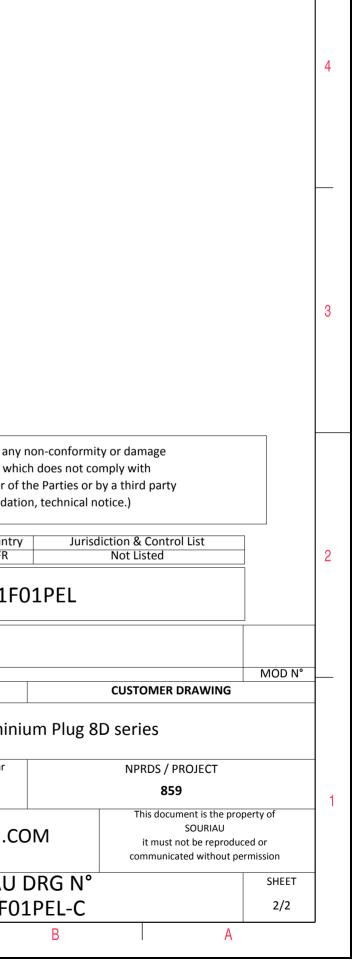

ω