



(1)

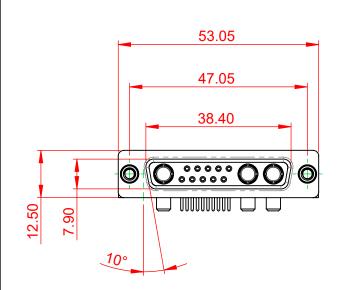



## NOTES:

HOUSING:


**OPERATING TEMPERATURE:** -55°C ~ 125°C

.XX ±0.13

.XXX ±0.05

POWER/CO-AX CONTACT RATING: 40A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.


**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE:



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
COMBINAT			DRAWN: C.B DATE: JAN. 01/201		
		CHECKED:	DATE:		
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-13W3240-4T6		ISSUE	
	CE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-13W	3240-4T6	1	

5000MΩ min.

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. MATERIAL:

SHELL: CONTACT:

STEEL, TIN PLATED

THERMOPLASTIC POLYESTER, UL94V-0 COPPER ALLOY, GOLD FLASH PLATED

