


MODEL NO.	"L"	P/N
PBR1X3230U-VL	30000	97169
PBR1X326U-VL	2000	87528
PBR1X323U-VL	1000	87527

NOTES:


- OPERATING TEMPERATURE -55°C ~ +70°C.
- MINIMUM BEND RADIUS R25.

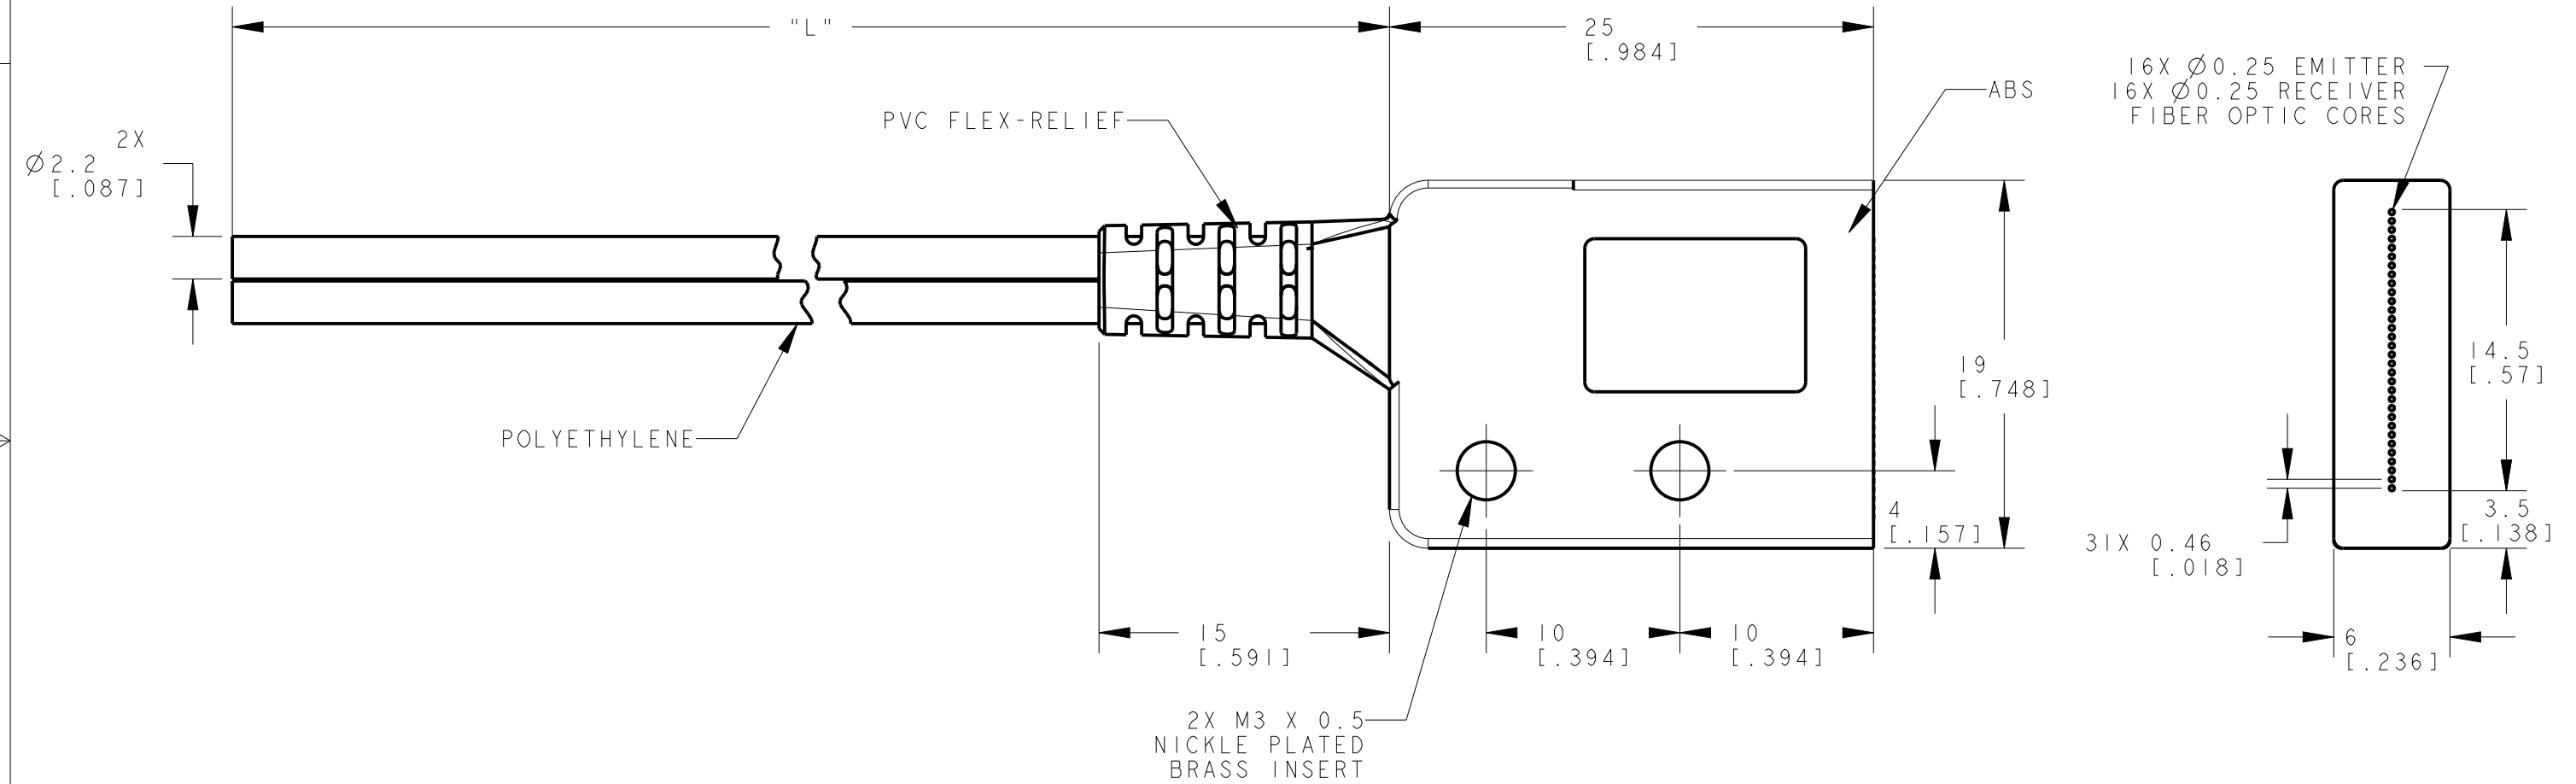

- NOTES:
- ALL DIMENSIONS ARE MILLIMETERS [INCHES] UNLESS OTHERWISE NOTED.
 - REFER TO "www.bannerengineering.com" FOR ADDITIONAL DATA AND SPECIFICATIONS.

This drawing is the property of BANNER ENGINEERING CORP. Any use or reproduction, in any form, without prior written permission of Banner is prohibited. © 2015 Banner Engineering Corp.

THIRD ANGLE PROJECTION



		BANNER ENGINEERING CORP.	
		www.bannerengineering.com	
TITLE			
PBR1X32 VALUE LINE SERIES UNTERMINATED			
SIZE	DRAWING NO.	REV.	
B	178350	A	
SCALE	SHEET		CREO
3:1	1 OF 1		