



ÅÞ

ISSUE NUMBER	
ORIGINAL	(1)

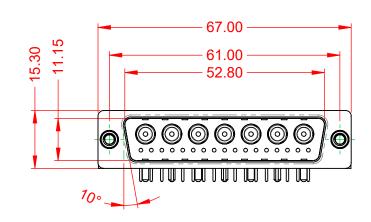




## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05



				SW REFERENCE NO.: 629 COMBO ASSEMBLY		
COMBINAT	COMBINATION D-SUB		DATE: JAN. 01/20	19		
			DATE:			
	EDAC INC THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
TORONTO, ONTA CANADA	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-24W	7240-1N6	ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-24W	7240-1N6	1		

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

