



.X ±0.25 .XX ±0.13 .XXX ±0.05 10.70



NOTES:

| MATERIAL: HOUSING: SHELL: CONTACT: | THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED |
|---|--|
| OPERATING TEMPERATURE: | -55°C ~ 125°C |
| POWER/CO-AX CONTACT RATING: (IF PRESENT) | 10A (CURRENT) |
| SIGNAL CONTACT CURRENT RATING | : 5A PER CONTACT |
| SIGNAL CONTACT RESISTANCE: | 10mΩ MAX. |
| INSULATOR RESISTANCE: | 5000MΩ min. |
| DIELECTRIC | <i>∽</i> € |
| WITHSTANDING VOLTAGE: | 1000V AC rms |

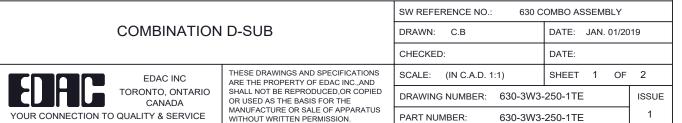





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



