



(1)

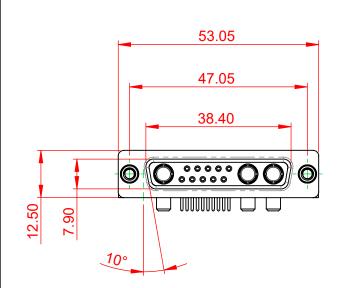




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

.XX ±0.13

.XXX ±0.05


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)	6
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.	4
INSULATOR RESISTANCE:	5000MΩ min.	

DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC rms



COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
		DRAWN: C.B	DATE: JAN. 01/20	19
		CHECKED:	DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
TORONTO, ONTARIO CANADA	ARIO SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE DRAWING NUMBER: 630-13		3250-4T6	ISSUE
	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-13W3	3250-4T6	1



