



(1)

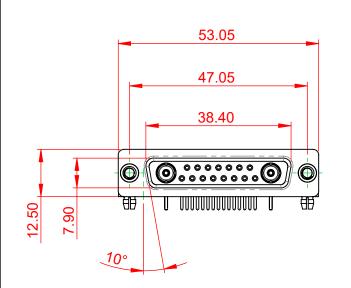



## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C

OPERATING TEMPERATURE.-55 C ~ 125 CPOWER/CO-AX CONTACT RATING:75Ω (IMPEDANCE)(IF PRESENT)SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT


SIGNAL CONTACT CORRENT RATING: SA PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

.XX ±0.13


.XXX ±0.05





Γ	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-17W2640-7NB		ISSUE	
			PART NUMBER: 630-17W2	2640-7NB	1	

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

