


 REVISIONS

 REV
 ECO
 DESCRIPTION
 DATE
 BY
 APPR

 A1
 —
 RELEASE NEW DRAWING
 29/MAR/22
 MILO
 TOMMY

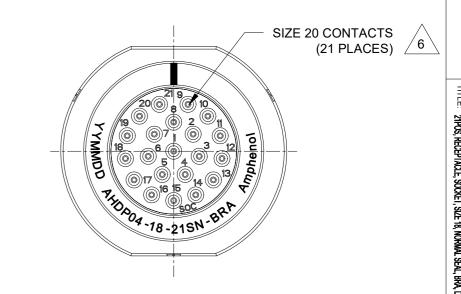

NOTES: UNLESS OTHERWISE SPECIFIED

MATERIAL

HOUSING: THERMOPLASTIC; BLACK

SEAL: SILICONE RUBBER

2. MODIFICATIONS: BACKSHELL RING ADAPTER (BRA); STANDARD DIA. WIRE SEAL;

3. SPECIFICATIONS:


- 3.1 OPERATING TEMPERATURE: -55°C TO +125°C.
- 3.2 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
- 3.3 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
- 3.4 MOISTURE RESISTANCE:


IP68(IM OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION):

- IP69K(MATED CONDITION).
- 3.5 MATING CYCLE DURABILITY: 100 CYCLES
- 3.6 RoHS COMPLIANT
- 4. MATING PART: AHDP06-18-21P* (* = SEAL TYPE)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

6 CONTACT SIZE AND WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL	CURRENT
SIZE	O.D.	O.D.	WIRE RANGE	RATING
20	1.02 mm (.040in)	2.41 mm (.095 in)	16-22 AWG (1.5-0.5mm²)	7.5 AMPS

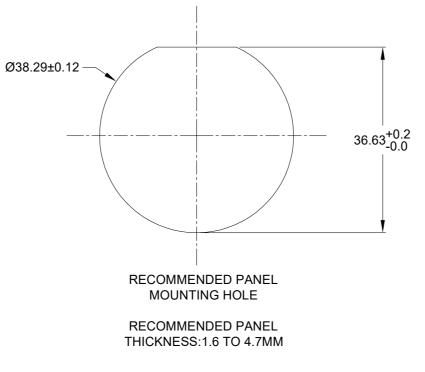

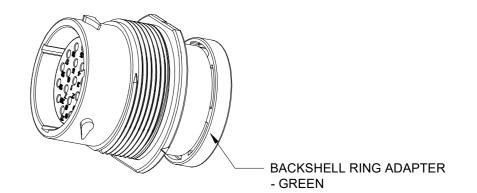

AHDP04-18-21SN-BRA REV: A1

S.

	AHDP04-18-21SN-BRA PART NUMBER		BRA	REF:HDP24-18-21SN-L017 DESCRIPTION			
QUANTITY							
		ı	MAT	ERI	ALS LIST		
UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE	Δ		
1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64		DRAWN:	MILO	29/MAR/22	Amphenol		
2 PL DEC ±0.30 3 PL DEC ±0.08	DEC ±0.15 Angles ±1°		SULLEN	30/MAR/22	44724 Morley Drive		
3) Note reference = X		ENGINEER:					
MATERIAI SPECIFICA	TIONS:	APPROVAL:	TOMMY	31/MAR/22	Clinton Township, MI 48036		
WEIGHT: 42.8g		CUSTOMER:			21POS, RECEPTACLE, SOCKET, SIZE 18, NORMAL SEAL, BRA, DURAMATE AHDP		
		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL					
PROCESS SPECIFICATIONS:				RMANCE DATA OPERTY OF ON. NO RIGHTS JED. ALL	B C- AHDP04-18-21SN-BRA	A1	
NEXT ASS'Y:	EXT ASS'Y: DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.			SCALE: NONE DURAMATE SHEET 1 OF	1		