


1. Wiring Diagram.

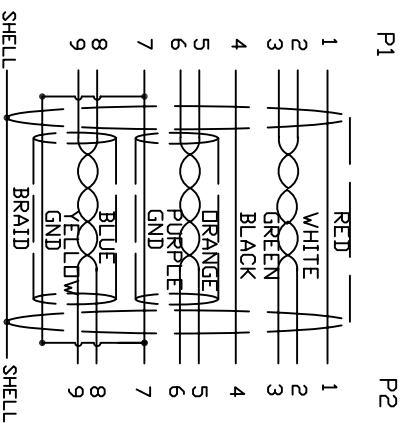

2. Cable test condition :

- Open / Short : 100%
  - Insulation resistance : 5M ohms
  - Contact resistance : 2 ohm
  - Hipot : DC 300V / 1 sec
3. Each pcs with PE palybag

NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF
6	CORE	RH14.2*28.5*6.35mm	2	
5	CONN	USB3.0 B MALE G/F BLUE	1	P2
4	PVC	45P PVC BLACK OVERMOLD	2 <sup>5g</sup>	
3	PE	LLDPE 500026 6201	1 <sup>6g</sup>	
2	CONN	USB3.0 A/M G/F BLUE	1	P1
1	CABLE	《28AWG (7/0.12TC) *1P+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *1P+24AWG(7/0.2TC)*2C+A+D+B (96/0.12AM) OD5.5 BLACK	1	3000mm
PART NO.		DESCRIPTION	QTY	UNIT/REF
		BILL OF MATERIAL		

A	2015/12	INITIAL RELEASE	2015/11/24
REV/BCN#		DESCRIPTION	DATE
Cnc Tech,LLC		TITLE	
DRAWN EDWIN LAI	DATE 11/24/15	DWN NO. 103-1030-BL-F0300	REV 3M
CHECKED WENC	DATE 11/24/15	CUSTOMER P/NI:	
APPROVAL		CUSTOMER:	
		SHEET 1 OF 1	