

NOTE:

MATERIAL

HOUSING: PA66 UL94V-0, BLACK

CONTACT: BRASS

NUT: BRASS

O-RING: EPDM, BLACK

FINISH

CONTACT: 10u" GOLD PLATED

NUT: NICKEL

ELECTRICAL

RATED CURRENT: 4A

RATED VOLTAGE: 60V

INSULATOR RESISTANCE: 100 MΩhms MIN.




CONTACT RESISTANCE: 10 mΩhms MAX.

WATER PROOF: IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C

MAX WIRE AWG: 22 AWG

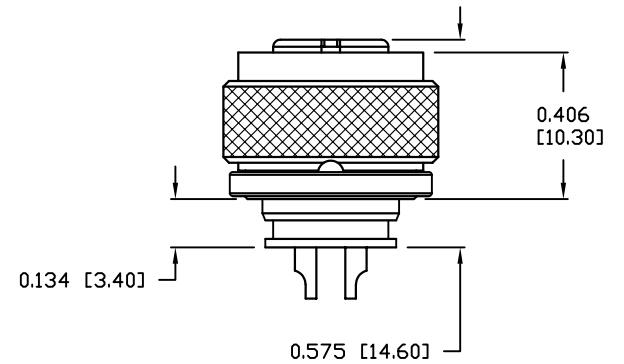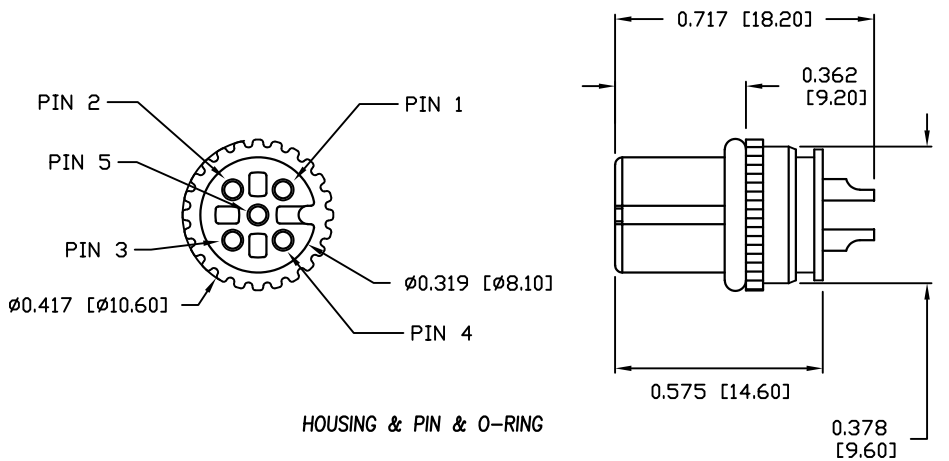

PLEASE NOTE THAT THE ANTI-VIBRATION DETENT IS MADE FROM PLASTIC AND IS NOT DESIGNED TO WITHSTAND MATING AND UN-MATING CYCLING; THIS WILL RESULT IN FAILURE OF THE ANTI-VIBRATION DETENT

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON

DATE:
08/04/2016

NorComp

SCALE:
NTS

SHEET 1 OF 1

REV 4

DWG NO.

858VA05-203RLU4