


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	48 Ω	128 Ω	299 Ω
Minimum	- Ω	102 Ω	- Ω

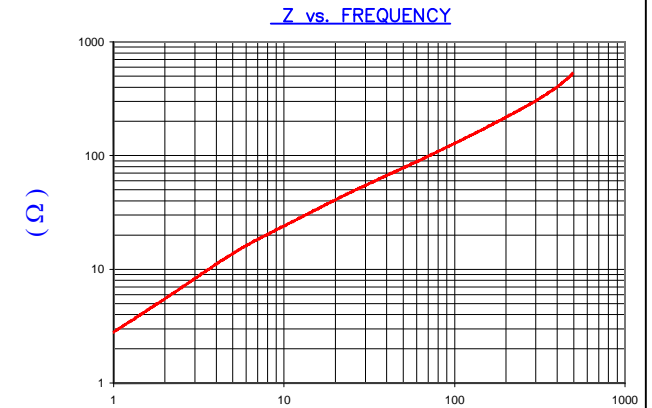

FREQUENCY (MHz)  
 AGILENT E4991A Impedance/Material Analyzer  
 HP 16092A-Test Fixture REF# 3735


FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	26.00 [1.024]	±	0.42 [0.017]
B	20.50 [0.807]	±	0.35 [0.014]
C	10.00 [0.394]	±	0.20 [0.008]
D	6.00 [0.236]	+ / -	0.25 [0.010] / 0.20 [0.008]
E	0.80 [0.031]	+ / -	0.20 [0.008] / 0.10 [0.004]

WEIGHT/1000 6.71 kgs [14.79 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

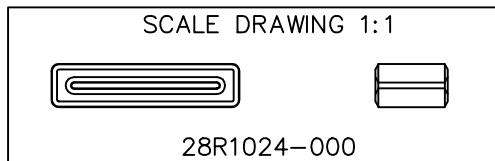

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
D	UPDATE THE LOGO	05/13/15	QIU	PROJECT/PART NUMBER:	28R1024-000	REV	D
C	UPDATE COMPANY LOGO	03/17/08	JRK	PART TYPE:	FERRITE RIBBON CORE	DRAWN BY:	JRK
B	UPDATE Z SPECS AND COMPANY LOGO	07/27/07	JRK	DATE:	06/30/04	SCALE:	3 : 1
A	ORIGINAL DRAFT	06/30/04	JRK	CAD #	28R1024-000-D	MATERIAL:	
REV	DESCRIPTION	DATE	INT	TOOL #	R1024		