


204723 SERIES  
BACKSHELLS  
QTY: SEE CHART

885961726  
(OR EQUIVALENT)  
450 X 500 X .07 POLYBAG  
QTY: (4) PER CARTON

313005940  
2-CELL DIVIDER  
QTY: (2) PER CARTON

967080007  
CARTON  
QTY: (1) REQ'D

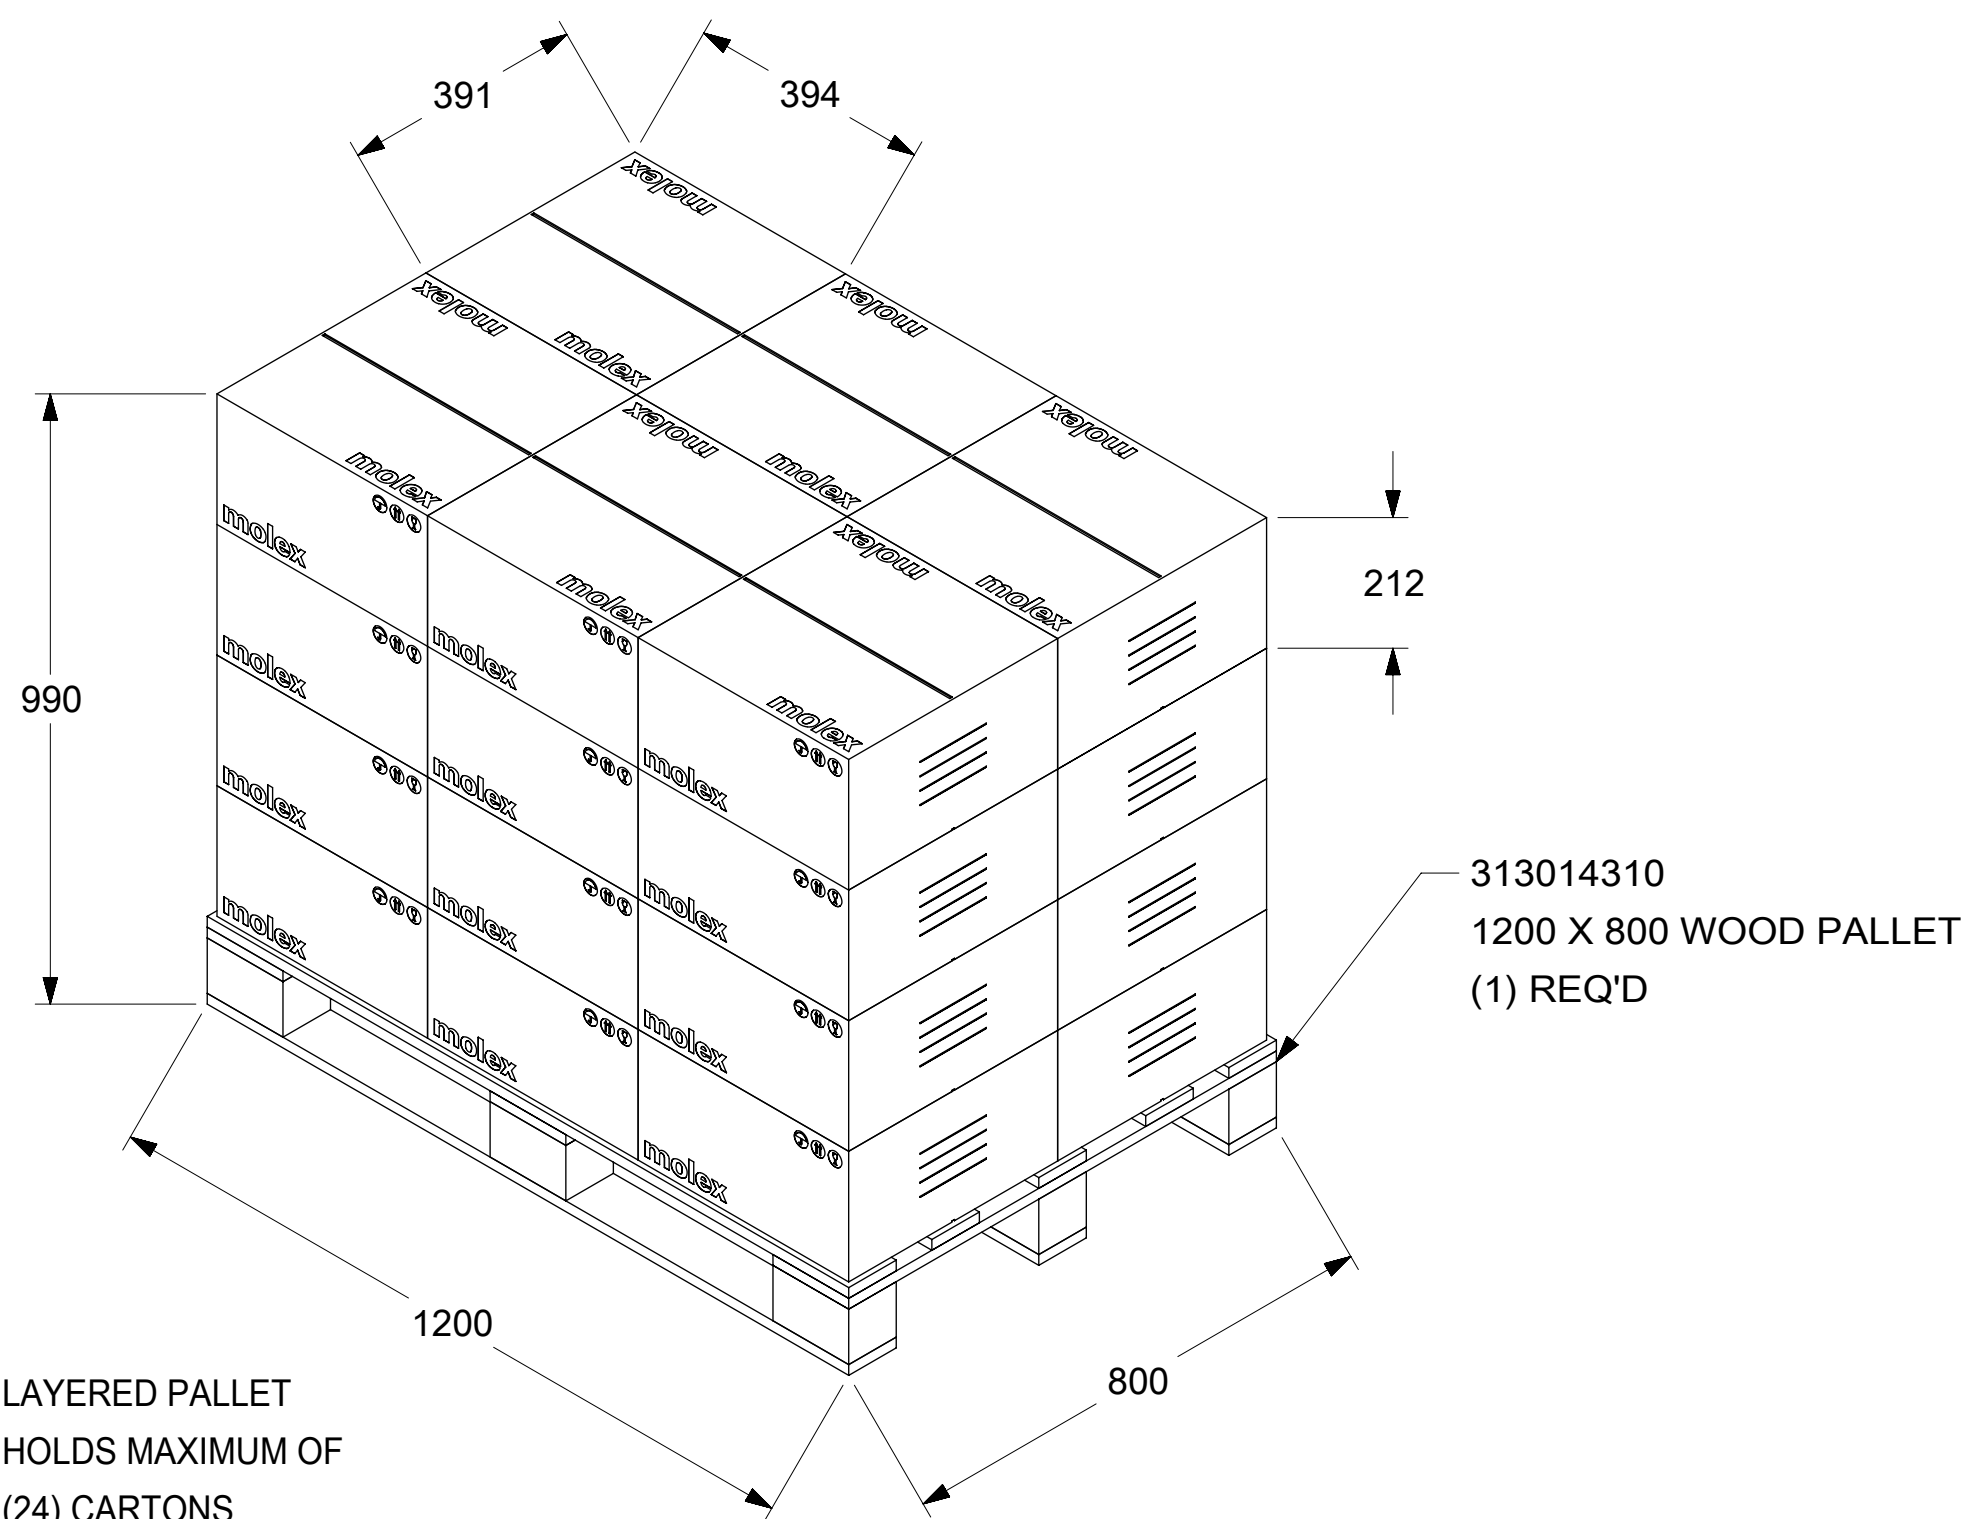

313014310  
1200 X 800 WOOD PALLET  
(1) REQ'D

LAYERED PALLET  
HOLDS MAXIMUM OF  
(24) CARTONS

CKT. SIZE	BACKSHELL PART NO.	DESCRIPTION	QTY. PER BAG	QTY. PER CARTON (1) SPQ
2	2047230*02	2 CKT BACKSHELL MINIFIT	650	2600
4	2047230*04	4 CKT BACKSHELL MINIFIT	500	2000
6	2047230*06	6 CKT BACKSHELL MINIFIT	350	1400
8	2047230*08	8 CKT BACKSHELL MINIFIT	250	1000
10	2047230*10	10 CKT BACKSHELL MINIFIT	250	1000
12	2047230*12	12 CKT BACKSHELL MINIFIT	220	880
14	2047230*14	14 CKT BACKSHELL MINIFIT	220	880
16	2047230*16	16 CKT BACKSHELL MINIFIT	200	800
18	2047230*18	18 CKT BACKSHELL MINIFIT	200	800
20	2047230*20	20 CKT BACKSHELL MINIFIT	200	800
22	2047230*22	22 CKT BACKSHELL MINIFIT	180	720
24	2047230*24	24 CKT BACKSHELL MINIFIT	180	720

NOTES - PACKAGING PROCEDURE:

- FOLD AND TAPE BOTTOM FLAPS OF CARTON. TAPE SHOULD EXTEND UP SIDES OF CARTONS AT LEAST 3 INCHES.
- FOLD AND INSERT (2) 2-CELL CORRUGATED DIVIDERS INTO CARTON AS SHOWN.
- POLYBAGS TO BE FILLED WITH QUANTITY OF PARTS AS SPECIFIED PER CHART.
- ADD WATER TO POLYBAGS TO MOISTURIZE PARTS PER WEIGHT RATIOS SPECIFIED IN AS-45499-001. BAGS TO BE HEAT SEALED TO RETAIN MOISTURE.
- PLACE (4) SEALED BAGS INTO CARTON, (1) BAG PER EACH CELL.
- CLOSE TOP FLAPS OF CARTON AND TAPE. TAPE SHOULD EXTEND DOWN SIDES OF CARTON AT LEAST 3 INCHES.
- ADD LABELS TO CARTONS AS REQUIRED.
- FOR LARGER SHIPMENTS, CARTONS MAY BE LAYERED ON PALLET (6) CARTONS PER LAYER AS SHOWN, WITH A MAXIMUM OF (4) LAYERS.
- CARTONS ON PALLET TO BE UNITIZED WITH BANDING AND STRETCH FILM PER PK-313301-625.
- QTY. OF (4) BACKSHELLS REQUIRED PER CONNECTOR.
- QTY. OF PARTS PER BAG ARE PRELIMINARY.

QUALITY SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
▽ = 0	EC NO: 602415 DRWN: GJEEVANSURES CHKD: SCS02 REV: APPR: ISHWARG	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE							
▽ = 0		ANGULAR TOL ± °		mm	10:1							
▽ = 0		4 PLACES ±	DRWN BY	DATE								
▽ = 0		3 PLACES ±	GSHARMA	2017/06/01	MINIFIT-BACKSHELL							
▽ = 0		2 PLACES ±	CHKD BY	DATE								
▽ = 0		1 PLACE ±	APPR BY	DATE								
⊠ = 0		0 PLACES ±	KPRASAD	2017/08/18	PACKAGING DESIGN DRAWING							
■ = 0		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWING SIZE	THIRD ANGLE PROJECTION	SERIES	MATERIAL NUMBER	CUSTOMER	SEE CHART				
▽ = 0		A1	C		204723	2047230001-PK	DOC TYPE	DOC PART	SHEET NUMBER	1 OF 1		