





ISSUE NUMBER	
ORIGINAL	(1)

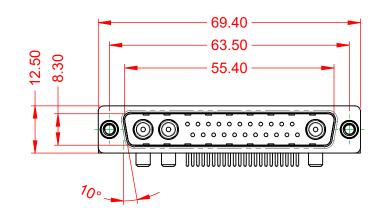



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

10.67 Œ 13.20

PO	WER/CO-AX CONTACT RATING:	40A (CURRENT
(IF	PRESENT)	
SIG	SNAL CONTACT CURRENT RATING:	5A PER CONTA
SIG	GNAL CONTACT RESISTANCE:	10mΩ MAX.
INS	SULATOR RESISTANCE:	5000MΩ min.
DIE	LECTRIC	

.XX ±0.13 .XXX ±0.05

WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

IT)

-55°C ~ 125°C

ACT

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	CANADA OR US	MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-25W3240-4NE		ISSUE	
YOUR CONNECTION TO	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-25W	3240-4NE	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

