

TOLERANCE UNLESS OTHERWISE SPECIFICATION DO NOT MAKE MANUAL REVISIONS TO MASTER.





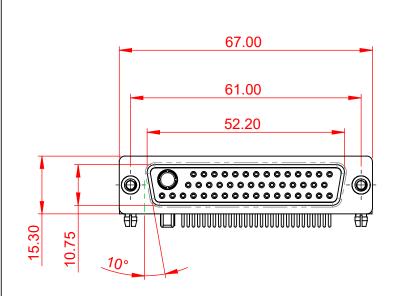



NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Ac rms} \\ \mbox{Insulator resistance: 5000V AC rms} \\ \mbox{$


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

	SW REFERENCE NO.: 630 COMBO ASSEMBLY			
COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-47W1650-4T3		ISSUE
		PART NUMBER: 630-47W	1650-4T3	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. L94V-0

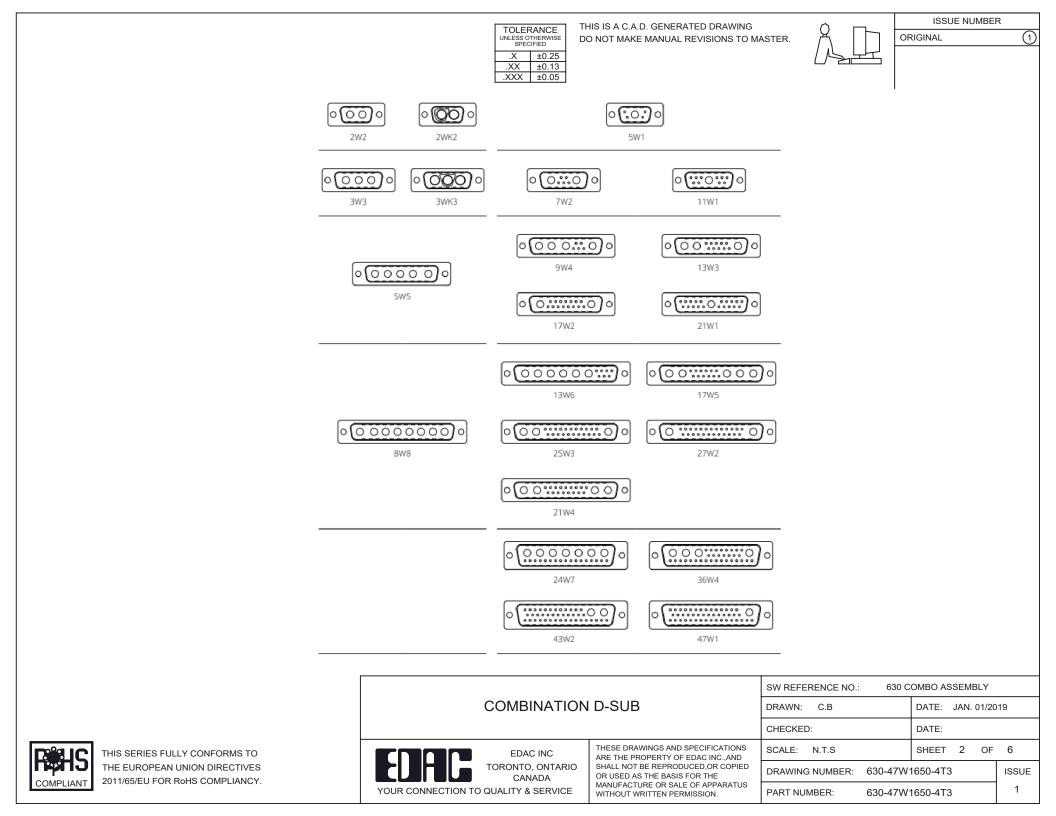



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$



3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female



21W4 Male/Female



5W5 Male



PCB EDGE

8W8 Male



PCB EDGE




PCB EDGE

2.77

27W2 Male/Female


5W5 Female

COMPLIANT



8W8 Female





22.70 2.77 PCB EDGE

PCB EDGE

21W1 Male/Female




630 COMBO ASSEMBLY

4

ISSUE

1

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2





	DRAWN: C.B		DATE:	JAN.	01/20	19
	CHECKED:		DATE:			
FICATIONS	SCALE: N.T.S		SHEET	3	OF	4
OR COPIED HE	DRAWING NUMBER: 630-47W ⁷		1650-4T	3		IS
PPARATUS DN.	PART NUMBER:	630-47W	1650-4T	3		

SW REFERENCE NO .:

17W2 Male/Female

TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.
















13W3 Male





25W3 Male





2.77

24.77


23.3

PCB EDGE

31.75

21.9

36W4 Female

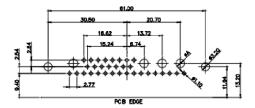

13W6 Male





30.50

2.77

22.16

20.76

13W6 Female

13W3 Female

 .X
 ±0.25

 .XX
 ±0.13

 .XXX
 ±0.05

43W2 Female




17W5 Male


COMPLIANT












20.7

13.72

PCB EDGE



PCB EDGE

61.00 30.50 20.70 20.70 20.72 20

		COMBINATION D-SUB			SW REFERENCE NO.: 630 COMBO ASSEMBLY			
					DRAWN: C.B	DATE: JAN. 01/20	019	
				CHECKED:	DATE:			
.	THIS SERIES FULLY CONFORMS TO		EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: N.T.S	SHEET 4 OF	4	
_	THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR R₀HS COMPLIANCY.		,	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630	-47W1650-4T3	ISSUE	
			MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630	-47W1650-4T3	1		