

I	D	п	т	0



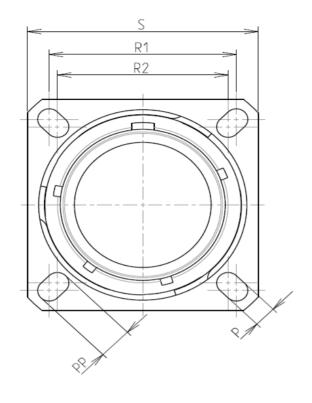



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 15

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 19.54 g ± 10%

8D 0

G

15

F

05

Ρ

F

С

Dim	Nominal
Р	3.25±0.2
PP	4.39±0.2
R1	24.61
R2	23.01
S	31±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M22x1-6g


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 15-05

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

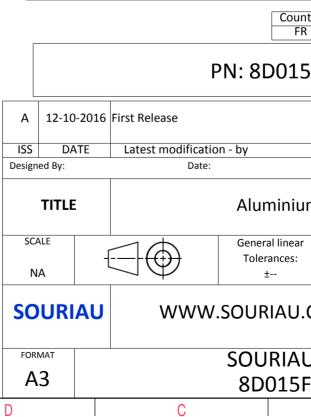

	Φ		А			
					4	
AS EXA	AMPLE				3	
r any non-conformity or damage s which does not comply with er of the Parties or by a third party indation, technical notice.)						
.5F05PC						
MOD N°						
um	CUSTOMER DRAWING					
ar :	NPRDS / PROJECT 859					
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1		
	DRG N° 5PC-C			SHEET 1/2		
	В		А		1	

		۵	н т	m	D	0	
		Contact Layout					Panel Cutou
4	د.	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ &$				SQUARE FLANGE RECEPTAC REAR MOUNTING R1	LE (TYPE 0)
		Location X-axis Y-axis (mm) (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)			;		ØT
ယ							Dim ØA ØAA R1 ØT
						due to a u the Specificatio	all not be liable for any use of the Products wh ons issued by either of essional recommendat
N							Countr FR
							PN: 8D015F
						0-2016 First Release ATE Latest modifica	
					TITL		Aluminium
_					SCALE		General linear Tolerances: ±
					SOUR		W.SOURIAU.C
					FORMAT A3		SOURIAU 8D015F(
l	Н	G	F	E	D	С	

