
ت	тг 	m	t	D	0	σ	J 2	Þ
	ØS							
	I				LAY	YOUT SHOWN AS EXAMPLE		
	Keying Shown as	s example						
	F	Connector dimension Dim Nominal						
-Standard : Based on MIL-DTL-38999 Series III-Shell Material: Composite-Shell Plating: Olive drab Cadmium-Insulator: Thermoplastic-Contacts: Copper Alloy		ØS 29.4 Max Z' 31.5 Max VV THREAD M18x1-6g			due to a use the Specifications	not be liable for any non-co of the Products which doe issued by either of the Par onal recommendation, tec	s not comply with ties or by a third party	
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum						Country FR	Jurisdiction & Control List Not Listed	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories					ł	PN: 8D513J26S	с	
-Temperature Range : -65°C to +175°C				A 17-10	0-2016 First Release			
-Salt Spray : 2000 hours -Mass : 23.6 g ± 10%				ISS DA Designed By:	ATE Latest modificatio Date:	on - by	CUSTOMER DRAWING	MOD N°
				TITLE	E	Composite P	lug 8D series	
BASIC SERIES: 8D 5 - 13 J SHELL TYPE : Plug with RFI Shielding	J 26 S C			SCALE NA		General linear Tolerances: ±	NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact			RIENTATION : C	SOURI	IAU WWW	.SOURIAU.COM	This document is the SOURIAU it must not be repro	oduced or
SHELL SIZE : 13		CONTACT TYPE : SOCKE		FORMAT		SOURIAU DRO	communicated withou	t permission SHEET
PLATING : J = Olive drab Cadmium		CONTACT L	AYUUT : 13-20					

_	Ŧ	۵	н г	m	D	0
		Contact Layout				
4						
		2#12 6#22D				
ω	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0				
	_					
27						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o (professional recommendat Countr FR PN: 8D513
_					A 17-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					TITLE SCALE NA	General linear Tolerances:
					FORMAT	
					A3	SOURIAU 8D513J2
L	Н	G	F	E	D	C

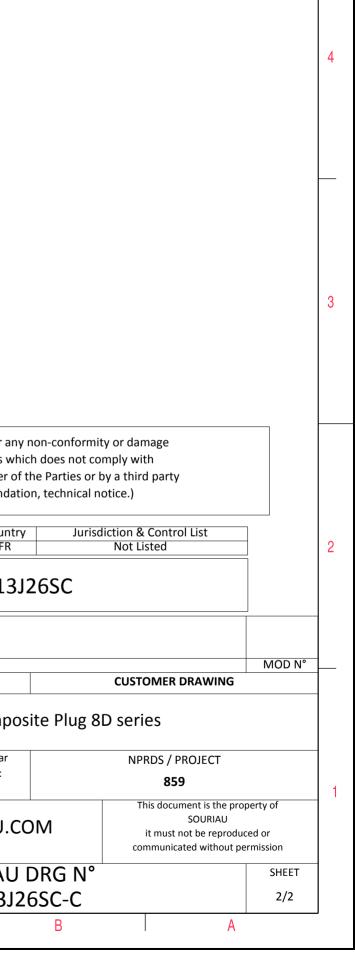

ω