



.XX ±0.13 .XXX ±0.05

Å	

ISSUE NUMBER	
ORIGINAL	(1)

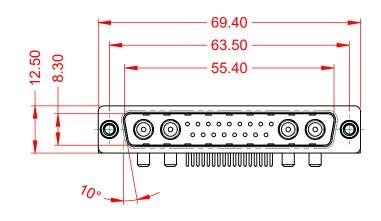



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

10.67 O 13.20

POWER/CO-AX CONTACT RATING:	30A (CURRENT
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

VT)

-55°C ~ 125°C

TACT

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20)19
			CHECKED:	DATE:	
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629	21W4240-3NE	ISSUE
YOUR CONNECTION TO			PART NUMBER: 629	21W4240-3NE	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

