
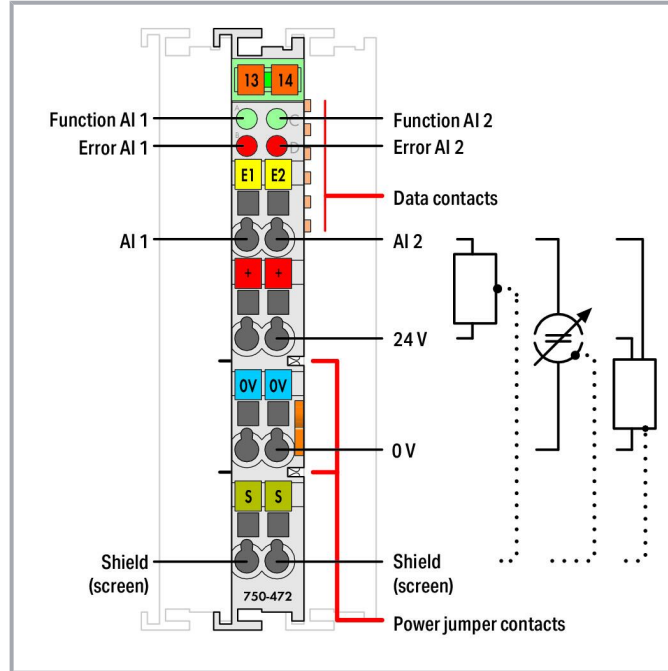


Data sheet | Item number: 750-472

2-channel analog input; 0 ... 20 mA; Single-ended; 16 bits



[www.wago.com/750-472](http://www.wago.com/750-472)

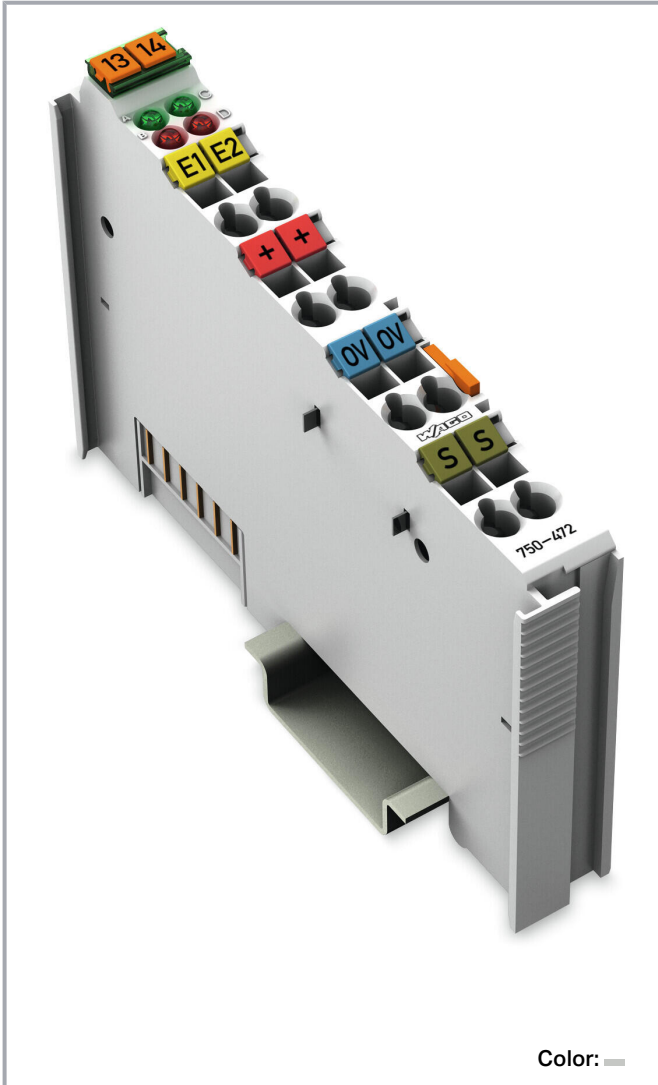

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

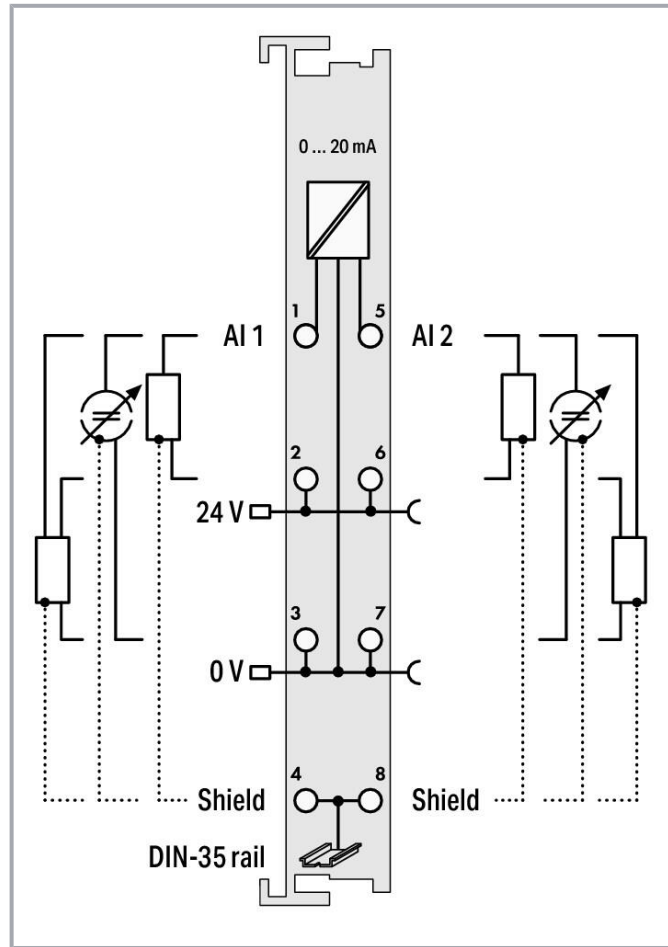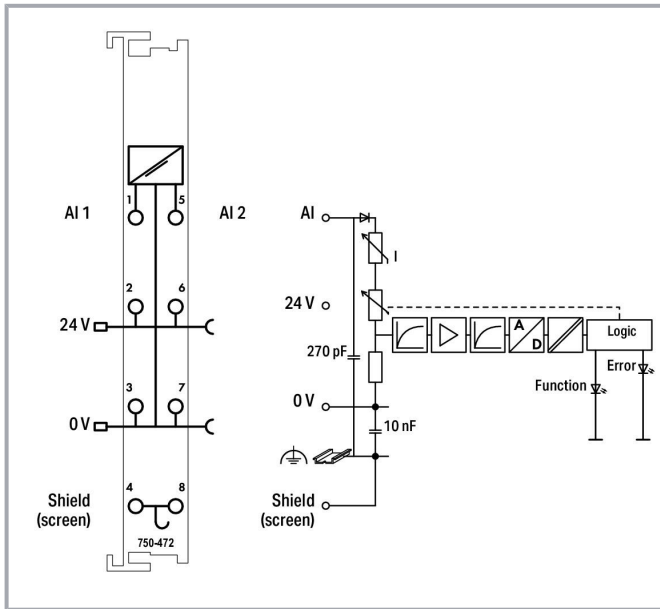

## Item description

This analog input module powers field-side signal conditioners and transmits electrically isolated analog signals to the bus system.

The 24 V field supply is derived from the module's power jumper contacts.

The shield directly connects to the DIN-rail.

At approximately 25 mA, overload protection switches the measurement input to a high-resistance state. Once normal operating conditions resume, the measurement input will automatically switch back.

This module powers 2-wire signal conditioners without dedicated power supply.

## Data

### Technical data

Number of analog inputs

2

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



|  |   |
|--|---|
| Total number of channels (module)                              | 2   |
| Signal type  | Current   |
| Signal type (current)  | 0 ... 20 mADC   |
| Sensor connection  | 2 x (2-wire, 3-wire)  |
| Input filter frequency (analog)                                | 50 Hz   |
| Input voltage (max.)   | 24 V  |
| Input voltage (note)   | Non-linear, overload protected $U = 1.2 V + 160 \Omega \times I_{meas}$   |
| Signal characteristics   | Single-ended  |
| Resolution [bit]   | 15 bits   |
| Input resistance (max.)  | 220 $\Omega$  |
| Data width   | 2 x 16-bit data; 2 x 8-bit control/status (optional)  |
| Overvoltage protection   | 30 V, reverse polarity protected  |
| Noise rejection at sampling frequency                          | -100 dB   |
| Noise rejection above sampling frequency                       | -40 dB  |
| Conversion time (typ.)   | 80 ms   |
| Measurement error (reference temperature)                      | 25 °C   |
| Measurement error, deviation (max.) from the upper-range value | 0.1 %   |
| Temperature error (max.) of the upper-range value              | 0.01 %/K  |
| Supply voltage (system)  | 5 VDC; via data contacts  |
| Current consumption (5 V system supply)                        | 75 mA   |
| Supply voltage (field)   | 24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact) |
| Isolation  | 500 V system/field  |
| Indicators   | LED (A, C) green: Function AI 1, AI 2; LED (B, D) red: Error AI 1, AI 2   |
| Number of incoming power jumper contacts                       | 2   |
| Number of outgoing power jumper contacts                       | 2   |

## Connection data

|                                       |  |
|---------------------------------------|--|
| Connection technology: inputs/outputs | 8 x CAGE CLAMP®                              |
| Connection type 1                     | Inputs/Outputs                               |
| Solid conductor                       | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor               | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                          | 8 ... 9 mm / 0.31 ... 0.35 inches            |

## Physical data

|        |                       |
|--------|-----------------------|
| Width  | 12 mm / 0.472 inches  |
| Height | 100 mm / 3.937 inches |

Subject to changes. Please also observe the further product documentation!



|                                   |                        |
|-----------------------------------|------------------------|
| Depth                             | 69.8 mm / 2.748 inches |
| Depth from upper-edge of DIN-rail | 62.6 mm / 2.465 inches |

### Mechanical Data

|               |             |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

### Material Data

|                    |                              |
|--------------------|------------------------------|
| Color              | light gray                   |
| Housing material   | Polycarbonate; polyamide 6.6 |
| Fire load          | 1.048 MJ                     |
| Weight             | 52.5 g                       |
| Conformity marking | CE                           |

### Environmental requirements

|  |                                       |
|--|---------------------------------------|
| Ambient temperature (operation)  | 0 ... +55 °C                          |
| Ambient temperature (storage)  | -25 ... +85 °C                        |
| Protection type  | IP20                                  |
| Pollution degree   | 2 per IEC 61131-2                     |
| Operating altitude   | 0 ... 2000 m / 0 ... 6562 ft          |
| Mounting position  | horizontal (standing/lying); vertical |
| Relative humidity (without condensation)   | 95 %                                  |
| Vibration resistance   | 4g per IEC 60068-2-6                  |
| Shock resistance   | 15g per IEC 60068-2-27                |
| EMC immunity to interference   | per EN 61000-6-2, marine applications |
| EMC emission of interference   | per EN 61000-6-4, marine applications |
| Exposure to pollutants   | Per IEC 60068-2-42 and IEC 60068-2-43 |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                |

### Commercial data

|               |                 |
|---------------|-----------------|
| Product Group | 15 (I/O System) |
| eCl@ss 10.0   | 27-24-26-01     |
| eCl@ss 9.0    | 27-24-26-01     |
| ETIM 8.0      | EC001596        |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



|                       |               |
|-----------------------|---------------|
| ETIM 7.0              | EC001596      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | box           |
| Country of origin     | DE            |
| GTIN                  | 4045454393250 |
| Customs tariff number | 85389099990   |

## Environmental Product Compliance

|   |   |
|---|---|
| CAS-No.                                   | 1303-86-2<br>1317-36-8<br>7439-92-1       |
| REACH Candidate List Substance            | Diboron trioxide<br>Lead<br>Lead monoxide |
| RoHS Compliance Status                    | Compliant,With Exemption                  |
| RoHS Exemption                            | 6(c)<br>7(a)<br>7(c)-I<br>7(c)-II         |
| SCIP notification number (Austria)        | 9d279389-5833-4a4d-8dfc-9ff1554a068a      |
| SCIP notification number (Belgium)        | b430380a-5f5a-4a0e-b342-a8f8022b7085      |
| SCIP notification number (Bulgaria)       | 9b639e3c-ceee-47de-93d5-164d984a988a      |
| SCIP notification number (Czech Republic) | 17587add-e927-4a28-83f0-12e84d0417d7      |
| SCIP notification number (Denmark)        | e945a3b1-2e28-4951-b7dc-0b0cae876200      |
| SCIP notification number (Finland)        | 7f4fff93-eb05-4c3b-9c54-0bf9cd159cbf      |
| SCIP notification number (France)         | 039eca53-d7f3-4105-a136-97f9686537e2      |
| SCIP notification number (Germany)        | 316515dc-f2be-4d3b-a770-713a416fb010      |
| SCIP notification number (Hungary)        | d0dae67a-8e64-495c-ae2a-7dc59c03b61a      |
| SCIP notification number (Italy)          | ce6383bb-fe49-4fec-97bf-a514eff22c9f      |
| SCIP notification number (Netherlands)    | 31f71936-7478-46c1-95b6-0db28cf0a472      |
| SCIP notification number (Poland)         | 4101d911-f156-425d-bb27-72092eff3cf4      |
| SCIP notification number (Romania)        | d22eed89-1e92-4088-87b5-3d5579315490      |
| SCIP notification number (Sweden)         | 9a579517-0e65-4c37-af89-283c2e228a80      |

## Approvals / Certificates

### General approvals

| Logo | Approval | Additional Approval Text | Certificate name  |
|------|----------|--------------------------|-------------------|
|      | CCC      | CNCA-C23-01              | 2020312310000213  |
|      | CNEX     |                          | (Ex ec IIC T4 Gc) |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



EAC  
Brjansker Zertifizierungsstelle

TP TC 020/2011

EAC RU C-DE.AM02.  
B.00087/19

8

KC  
National Radio Research Agency

Article 58-2, Clause 3

MSIP-REM-W43-  
AIM750





UL  
Underwriters Laboratories Inc. (ORDINARY  
LOCATIONS)




UL 508

E175199 Sec.1

#### Declarations of conformity and manufacturer's declarations

| Logo   | Approval   | Additional Approval Text | Certificate name |
|--|--|--------------------------|------------------|
|    | EU-Declaration of Conformity<br>WAGO GmbH & Co. KG | -                        | -                |
|  | UK-Declaration of Conformity<br>WAGO GmbH & Co. KG | -                        | -                |

#### Approvals for marine applications

| Logo  | Approval  | Additional Approval Text | Certificate name |
|---|---|--------------------------|------------------|
|   | ABS<br>American Bureau of Shipping                    | -                        | 22-2219060       |
|  | BSH<br>Bundesamt fuer Seeschifffahrt und Hydrographie | -                        | 1104             |
|  | BV<br>Bureau Veritas S.A.                             | -                        | 13453/E0 BV      |
|   | DNV<br>DNV GL SE                                      | DNV-CG-0339, Aug. 2021   | TAA0000194       |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



KR  
Korean Register of Shipping

-

KR HMB05880-  
AC001



LR  
Lloyds Register EMEA

-

LR22180952TA



PRS  
Polski Rejestr Statków

-

TE/2236/880590  
/19








RINA  
RINA Germany GmbH

-

ELE343521XG001

#### Approvals for hazardous areas

| Logo   | Approval                                 | Additional Approval Text | Certificate name                                     |
|--|--|--------------------------|--|
|  | ATEX<br>TUEV Nord Cert GmbH              | EN 60079-0               | TUEV_14_ATEX_148929_X (II<br>3 G Ex ec IIC T4 Gc)    |
|  | CCC<br>CNEX                              | CNCA-C23-01              | 2020312310000213 (Ex ec IIC<br>T4 Gc)                |
|  | EAC<br>Brjansker Zertifizierungsstelle   | TP TC 012/2011           | EAC RU C-DE.AM02.B.00163<br>/19 (2Ex nA IIC T4 Gc X) |
|  | IECEX<br>TUEV Nord Cert GmbH             | IEC 60079-0              | IECEX TUN 14.0035 X (Ex ec<br>IIC T4 Gc)             |
|  | INMETRO<br>TÜV Rheinland do Brasil Ltda. | IEC 60079-0              | BR-Ex_TÜV 12.1297 X                                  |
|  | UKEx                                     | EN 60079-0               | UKCA_WAGO22UKEX003X_ec                               |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

DEKRA 8505

WAGO GmbH & Co. KG



UL  
Underwriters Laboratories Inc. (HAZARDOUS  
LOCATIONS)





UL 121201

E198726 Sec.1

## Optional accessories







### Supply module

Supply module

|  |  |  |
|--|--|--|
|   | <b>Item no.: 750-601</b><br>Power Supply; 24 VDC; fuse holder              | <a href="http://www.wago.com/750-601">www.wago.com/750-601</a> |
|   | <b>Item no.: 750-610</b><br>Power Supply; 24 VDC; fuse holder; Diagnostics | <a href="http://www.wago.com/750-610">www.wago.com/750-610</a> |
|   | <b>Item no.: 750-602</b><br>Power Supply; 24 VDC                           | <a href="http://www.wago.com/750-602">www.wago.com/750-602</a> |
|  | <b>Item no.: 750-612</b><br>Power Supply; 0 ... 230 V AC/DC                | <a href="http://www.wago.com/750-612">www.wago.com/750-612</a> |

### System housing

System enclosure

|  |   |  |
|--|---|--|
|  | <b>Item no.: 850-814/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate        | <a href="http://www.wago.com/850-814/002-000">www.wago.com/850-814/002-000</a> |
|  | <b>Item no.: 850-815/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate        | <a href="http://www.wago.com/850-815/002-000">www.wago.com/850-815/002-000</a> |
|  | <b>Item no.: 850-816/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate        | <a href="http://www.wago.com/850-816/002-000">www.wago.com/850-816/002-000</a> |
|  | <b>Item no.: 850-817/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate        | <a href="http://www.wago.com/850-817/002-000">www.wago.com/850-817/002-000</a> |
|  | <b>Item no.: 850-825</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20                      | <a href="http://www.wago.com/850-825">www.wago.com/850-825</a>                 |
|  | <b>Item no.: 850-826</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip | <a href="http://www.wago.com/850-826">www.wago.com/850-826</a>                 |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.





**Item no.: 850-827**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827](http://www.wago.com/850-827)



**Item no.: 850-827/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827/002-000](http://www.wago.com/850-827/002-000)



**Item no.: 850-826/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826/002-000](http://www.wago.com/850-826/002-000)



**Item no.: 850-828/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828/002-000](http://www.wago.com/850-828/002-000)



**Item no.: 850-828**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828](http://www.wago.com/850-828)



**Item no.: 850-834**

IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20

[www.wago.com/850-834](http://www.wago.com/850-834)



**Item no.: 850-835**

IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-835](http://www.wago.com/850-835)



**Item no.: 850-836**

IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-836](http://www.wago.com/850-836)

**Shield termination**

Shield clamping saddles



**Item no.: 790-116**

Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm

[www.wago.com/790-116](http://www.wago.com/790-116)



**Item no.: 790-124**

Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

[www.wago.com/790-124](http://www.wago.com/790-124)



**Item no.: 790-108**

Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm

[www.wago.com/790-108](http://www.wago.com/790-108)



**Item no.: 790-140**

Shield clamping saddle; diameter of compatible conductor

[www.wago.com/790-140](http://www.wago.com/790-140)



**Item no.: 790-216**

Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

[www.wago.com/790-216](http://www.wago.com/790-216)



**Item no.: 790-220**

Shield clamping saddle; 30 mm wide; 6 ... 20 mm

[www.wago.com/790-220](http://www.wago.com/790-220)



**Item no.: 790-208**

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

[www.wago.com/790-208](http://www.wago.com/790-208)

**Marking accessories**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)












Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Marker carrier

|   |  |  |
|---|--|--|
|  | <b>Item no.: 750-103</b><br>Group marker carrier | <a href="http://www.wago.com/750-103">www.wago.com/750-103</a> |
|---|--|--|

Marker

|  |   |  |
|--|---|--|
|     | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | <a href="http://www.wago.com/2009-145/000-006">www.wago.com/2009-145/000-006</a> |
|     | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white          | <a href="http://www.wago.com/2009-145">www.wago.com/2009-145</a>                 |
|     | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <a href="http://www.wago.com/2009-145/000-002">www.wago.com/2009-145/000-002</a> |
|     | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <a href="http://www.wago.com/2009-145/000-007">www.wago.com/2009-145/000-007</a> |
|     | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red    | <a href="http://www.wago.com/2009-145/000-005">www.wago.com/2009-145/000-005</a> |
|   | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | <a href="http://www.wago.com/2009-145/000-012">www.wago.com/2009-145/000-012</a> |
|   | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green  | <a href="http://www.wago.com/2009-145/000-023">www.wago.com/2009-145/000-023</a> |
|   | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | <a href="http://www.wago.com/2009-145/000-024">www.wago.com/2009-145/000-024</a> |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue                                    | <a href="http://www.wago.com/248-501/000-006">www.wago.com/248-501/000-006</a>   |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray                                    | <a href="http://www.wago.com/248-501/000-007">www.wago.com/248-501/000-007</a>   |
|  | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow                                  | <a href="http://www.wago.com/248-501/000-002">www.wago.com/248-501/000-002</a>   |

Subject to changes. Please also observe the further product documentation!



**Item no.: 248-501/000-012**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)



**Item no.: 248-501**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)



**Item no.: 248-501/000-017**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)



**Item no.: 248-501/000-005**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)



**Item no.: 248-501/000-024**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)



**Item no.: 248-501/000-023**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)



**Item no.: 750-100**  
Marker card; as a DIN A4 sheet; plain

[www.wago.com/750-100](http://www.wago.com/750-100)

Group marker carrier



**Item no.: 750-106**  
Group marker carrier

[www.wago.com/750-106](http://www.wago.com/750-106)

Carrier rail

Mounting accessories



**Item no.: 210-197**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

[www.wago.com/210-197](http://www.wago.com/210-197)



**Item no.: 210-198**  
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

[www.wago.com/210-198](http://www.wago.com/210-198)



**Item no.: 210-504**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

[www.wago.com/210-504](http://www.wago.com/210-504)











**Item no.: 210-505**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

[www.wago.com/210-505](http://www.wago.com/210-505)

**Item no.: 210-506**

Subject to changes. Please also observe the further product documentation!

|   |  |  |
|---|--|--|
|   | Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored                                   | <a href="http://www.wago.com/210-506">www.wago.com/210-506</a> |
|   | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored         | <a href="http://www.wago.com/210-508">www.wago.com/210-508</a> |
|   | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                  | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a> |
|   | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                 | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a> |
|   | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a> |
|   | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored                   | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a> |
|   | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a> |
|  | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored               | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a> |

## Downloads

### Documentation

#### Manual

|  |                       |               |          |
|--|-----------------------|---------------|----------|
| System Manual WAGO I/O System 750/753<br>Decentralized Automation Technology | V 3.3.0<br>2023 May 4 | pdf<br>8.8 MB | Download |
| Product Manual 2-channel, 0-20mA, single-ended<br>16 bits                    | V 1.1.0               | pdf<br>2.2 MB | Download |
| System Manual Series 750/753<br>Online HTML                                  |                       | URL           | Download |

#### Bid Text

|                        |             |                |          |
|------------------------|-------------|----------------|----------|
| 750-472<br>X81 - Datei | 2019 Feb 19 | xml<br>4.8 kB  | Download |
| 750-472<br>doc - Datei | 2017 Oct 17 | doc<br>28.7 kB | Download |

Subject to changes. Please also observe the further product documentation!

### Instruction Leaflet

|  |             |                 |          |
|--|-------------|-----------------|----------|
| CCC Ex (Additional information)<br>WAGO-I/O-SYSTEM *750-****/* | 2023 Apr 26 | pdf<br>163.6 kB | Download |
|--|-------------|-----------------|----------|

### System Description

|   |  |                 |          |
|---|--|-----------------|----------|
| 750/753 Series I/O-System – General Product Information |  | pdf<br>1.7 MB   | Download |
| Overview on WAGO-I/O-SYSTEM 750 approvals               |  | pdf<br>789.0 kB | Download |

### Additional Information

|   |                        |               |          |
|---|------------------------|---------------|----------|
| Disposal and Recycling<br>Electrical and electronic equipment, Batteries, Packaging | V 1.1.0<br>2022 Aug 18 | pdf<br>2.2 MB | Download |
|---|------------------------|---------------|----------|

### CAD/CAE-Data

#### CAD data

|                      |  |     |          |
|----------------------|--|-----|----------|
| 2D/3D Models 750-472 |  | URL | Download |
|----------------------|--|-----|----------|

#### CAE data

|                           |  |     |          |
|---------------------------|--|-----|----------|
| EPLAN Data Portal 750-472 |  | URL | Download |
| WSCAD Universe 750-472    |  | URL | Download |
| ZUKEN Portal 750-472      |  | URL | Download |

### Device Files

#### Device Driver

|  |                        |               |          |
|--|------------------------|---------------|----------|
| WAGO USB Service Kabel Treiber / Serie 750 und 857 | 6.5.3.0<br>2014 Sep 10 | zip<br>4.8 MB | Download |
|--|------------------------|---------------|----------|

### Environmental Product Compliance

#### Compliance Search

Subject to changes. Please also observe the further product documentation!

Data sheet | Item number: 750-472

[www.wago.com/750-472](http://www.wago.com/750-472)



[URL](#)

[Download](#)

Environmental Product Compliance 750-472

2-channel analog input; 0 ... 20 mA; Single-ended; 16 bits

---

## Installation Notes

## Product family

**WAGO I/O System 750/753**

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.