



S21 TRANS LOG MAG.
▶ 0.000 dB 0.100 dB/DIV

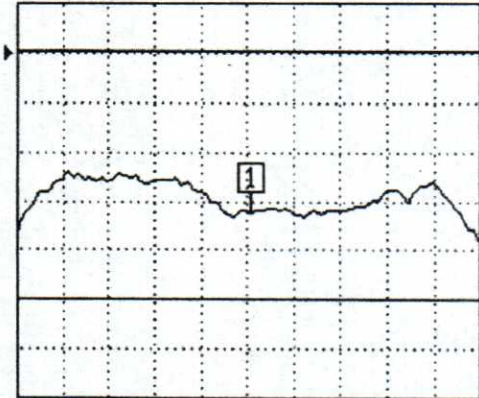


1.000000 GHz 2.000000

S11 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

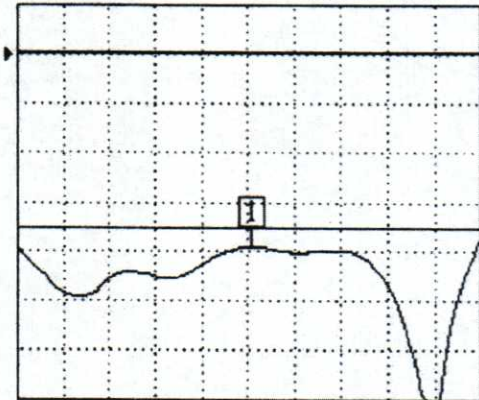


1.000000 GHz 2.000000

S22 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

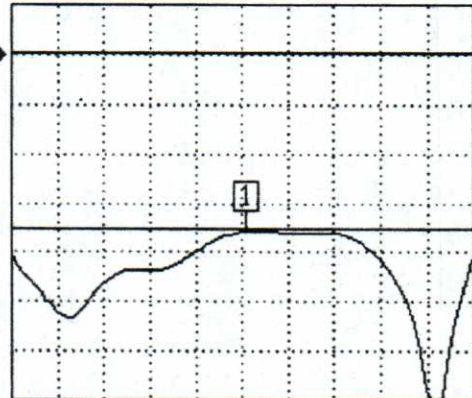

1.000000 GHz 2.000000

S12 TRANS LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

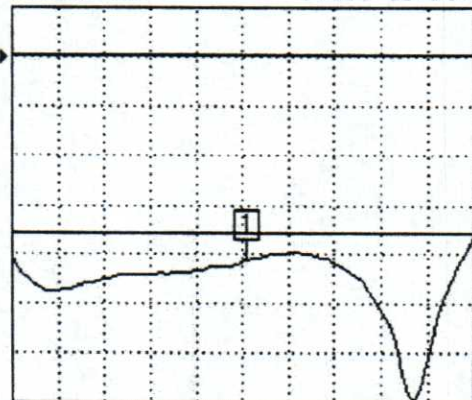

1.000000 GHz 2.000000

CH 2 - S22
REFERENCE PLANE
0.0000 mm

MARKER 1
1.512500 GHz
-18.010 dB

▶ MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS

D3C01W5 - Circulator

1.0 - 2.0 GHz

Isolation: 18 dB Min

Insertion Loss: 0.50 dB Max

VSWR: 1.30:1 Max

SMA-F connectors all 3 ports