


R77NN2470DQ00J

Aliases (77NN2470DQ00J)

Not for New Design

R77, Film, Double Metallized Polypropylene, General Purpose, 0.047 uF, 5%, 1000 VDC, 85°C, Lead Spacing = 22.5mm

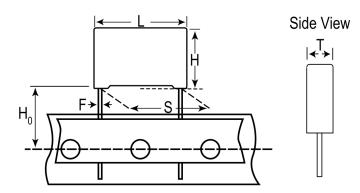

Click	here	for	the	ЗD	model.

Dimensions	, ,
L	26.5mm +0.3/-0.5mm
Н	17mm +0.1/-0.5mm
т	8.5mm +0.2/-0.5mm
S	22.5mm +0.6/-0.1mm
НО	18.5mm +/-0.5mm
F	0.8mm +/-0.05mm

Packaging Specifications

Packaging Packaging Quantity Ammo, 360x340x59mm, Box 280

General Information				
Series	R77			
Dielectric	Double Metallized Polypropylene			
Style	Radial			
Features	Pulse			
RoHS	Yes			
Lead	Wire Leads			
AEC-Q200	No			
Component Weight	4.6 g			
Notes	Series Replaced by R76.			

Specifications				
Capacitance	0.047 uF			
Capacitance Tolerance	5%			
Voltage AC	400 VAC			
Voltage DC	1000 VDC			
Temperature Range	-55/+105°C			
Rated Temperature	85°C			
Dissipation Factor	0.06% 10kHz, 0.1% 100kHz			
Insulation Resistance	100 GOhms			
Max dV/dt	2100 V/us			
Inductance	18 nH			

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.