

**NOTES:**


- ① MAT'L: COPPER
- ② PLATING: ELECTRO TIN (.0003 MIN)
- ③ TIN-PLATED BRASS FUNNEL FERRULE
- ④ NYLON INSULATION (COLOR CODED RED)

STUD SIZES: (+.005)

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING # E32244  
 "CSA" LISTING # 18689

WIRE SIZE: 22-18 AWG  
 .25-1.5 MM<sup>2</sup>

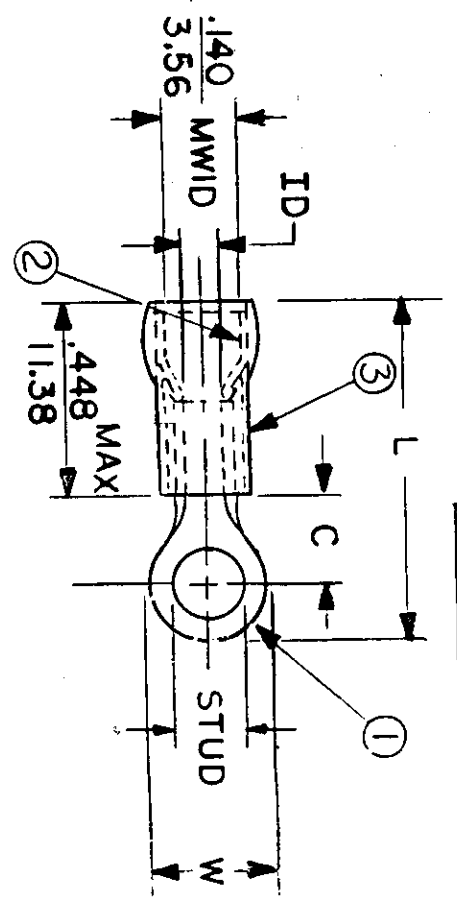

ALL DIMENSIONS = INCHES (MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W"	"C"	"L"	"ID"	AVAILABLE STUD SIZES	STOCK THICKNESS
	±.010	MIN.	MAX.	MIN.		
A-820-	.225	.157	.757	.062	02, 04, 06	.028 ±.001 .71
A-821-	.312	.270	.914	.062	06, 08, 10	.028 ±.001 .71
A-822-	.467	.386	1.108	.062	10, 14, 56	.028 ±.001 .71
A-826-	.534	.552	1.307	.054	10, 14, 56, 38	.031 ±.001 .79
A-832-	.254	.240	.855	.062	04, 06, 08	.028 ±.001 .71
	6.45	6.10	21.72	1.57		

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED

REFERENCE SCALE: NTS

DATE: 3-5-87

TITLE:

RING TONGUE TERMINAL AVIKRIMP 800-SERIES



DWG. NO. A CUSTOMER DWG

FILE NO. A-CD-801-01

FRAC. DEC. ANG.

± ± ±

CHKD. BY: EIMF

APPRD. BY: