
Mounting Option


12-.128 (3.25) Dia. Side Mounting Holes

Contact Detail

500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

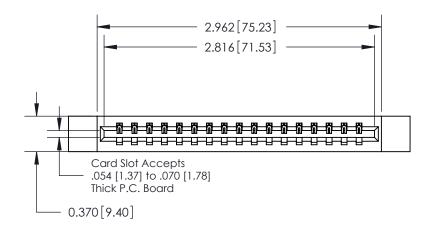

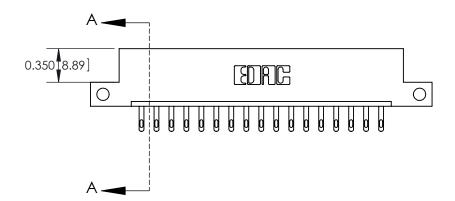


THIS IS A C.A.D. GENERATED DRAWING



ISSUE NUMBER

ORIGINAL



See Accompanying Pages for:

- Contact Bend Details
- Mounting Options
- Features and Specifications

837 Series High Temp Card Edge Connector Part Number: 887-017-500-112



EDAC INC TORONTO, ONTARIO CANADA

YOUR CONNECTION TO QUALITY & SERVICE

| THESE DRAWINGS AND SPECIFICATIONS |
|------------------------------------|
| ARE THE PROPERTY OF EDAC INC., AND |
| SHALL NOT BE REPRODUCED, OR COPIED |
| OR USED AS THE BASIS FOR THE |
| MANUFACTURE OR SALE OF APPARATUS |
| WITHOUT WRITTEN PERMISSION. |

| ACAD REFERENCE NO. 837 ENG MASTER | | | | |
|-----------------------------------|------------------|--|--|--|
| DRAWN: J.LEE | DATE: OCT. 06/09 | | | |
| CHECKED: | DATE: | | | |
| SCALE: NTS | SHEET 1 OF 4 | | | |
| DRAWING NUMBER | ISSUE | | | |

AWING NUMBER ISSUE 837 Assembly 1

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER

ISSUE NUMBE

ORIGINAL

1



| 837 Series High Temp Card Edge Connector Contact Bend Detail | | ACAD REFERENCE NO. 837 ENG MASTER | | | | |
|---|---|-----------------------------------|------------------|--------|--|--|
| | | DRAWN: J.LEE | DATE: OCT. 06/09 | | | |
| | | CHECKED: | DATE: | | | |
| EDAC INC | THESE DRAWINGS AND SPECIFICATIONS | SCALE: NTS | SHEET : | 2 OF 4 | | |
| TORONTO, ONTARIO | OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS | DRAWING NUMBER | • | ISSUE | | |
| YOUR CONNECTION TO QUALITY & SERVICE | | 837 Assembly | | 1 | | |





Features

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| | 837 Series High Temp Card Edge Connector Features and Specifications | | ACAD REFERENCE NO. 837 ENG MASTER | | | |
|--|---|---|-----------------------------------|-------------|----------|-----------|
| | | | DRAWN: | J.LEE | DATE: OC | CT. 06/09 |
| | | | CHECKED: | | DATE: | |
| | | OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS | SCALE: | NTS | SHEET . | 4 OF 4 |
| | TORONTO, ONTARIO | | DRAWING | NUMBER | | ISSUE |
| | T (SIO III (IIO) CANADA I | | 8 | 37 Assembly | | 1 |