

т	۵	п –	m	0



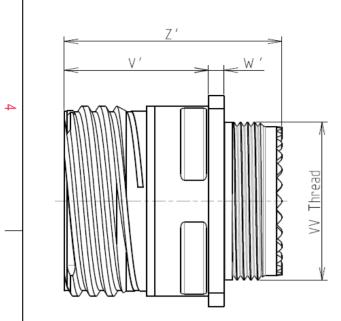

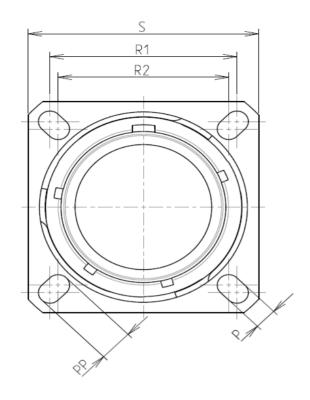

LAYOUT SHOWN AS

Keying Shown as example

Ρ

F

D

CHARACTERISTICS

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +175°C -Salt Spray : 2000 hours

Connector dimension Dim Nominal 3.25±0.2 Ρ PP 4.93±0.2 20.62 R1 18.26 R2 S 26.2±0.3 ۷' 19.5+1.4/-0 W' 2.1/3.65 Z' 32 Max VV THREAD M15x1-6g


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-99

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment Cour F

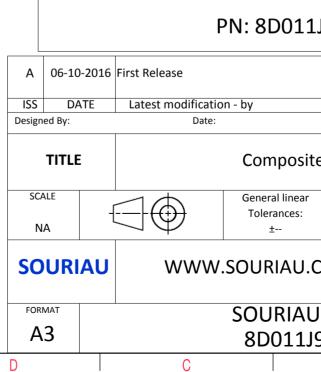

-Salt Spray	: 2000 nours					
-Mass	: 9.6 g ± 10%					
	0					
BASIC SERIES:		8D 0	-	11	J	99
	are Flange Receptac					
SHELLITPE . Squ	ale Flatige Receptac	le				
CONTACT TYPE	: Standard Crimp Cor	ntact				
SHELL SIZE : 11						

G

PLATING : J = Olive drab Cadmium

Н

	Ξ		A		
					4
					3
S EXA	AMPLE				0
whic er of t	non-conformit ch does not co he Parties or t on, technical n	mply with by a third part	ty		
Intry R	Jurisd	liction & Cont Not Listed	trol List		2
.1J9	99PD				
	1			MOD N°	
site	Receptacl		R DRAWING ES		
ar			[′] PROJECT 59		
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1
	U DRG N° SHEET				
198	9PD-C B		A	1/2	J

		۵		m	D	0
		Contact Layout				Panel Cuto
4	-×	$ \begin{array}{c} $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Contr positi ID A B C D E F F G Shell Arrangement Numb size no.	(Insert arrangement 11-99) Location X-axis (mm) (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 006 (0.00) +.000 (0.00) 065 (1.65) +.113 (2.87) 005 (1.65) +.113 (2.87) 005 (1.65) Service Contact	7		87	ØT
ω	11 -99 7					Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an
						due to a use of the Products w the Specifications issued by either o (professional recommenda
0						Count FR PN: 8D011
	-				A 06-10-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:
					SCALE	Composite General linear
<u> </u>					NA SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D011J
	Н	G	F	E	D	С

