


I	D G	н т (	m	<b>O</b>

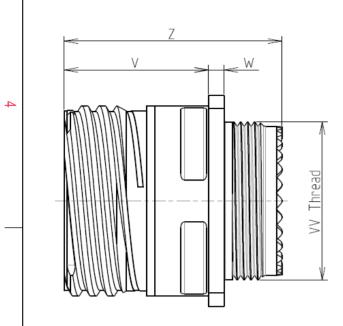

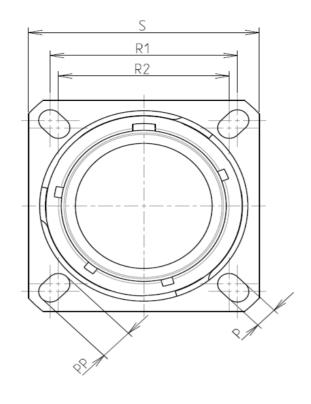



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	65°C to +200°C

: 48 hours

8D 0

G

13

F

03

А

F

С

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 13-03

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

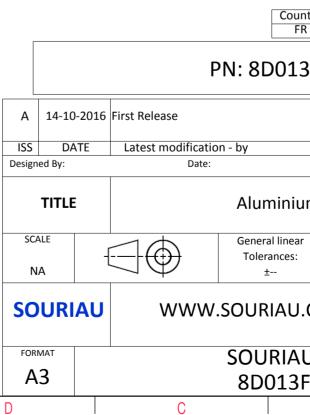

	Φ		А		_
	Re				4
AS EXA	AMPLE				3
s whic er of t	non-conformit ch does not co he Parties or b on, technical n	mply with by a third par	ty		
untry R					
3F(	03AC				
		CUSTOME	R DRAWING	MOD N°	
um	Receptacl				
ar	NPRDS / PROJECT 859				
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N° 3AC-C			SHEET 1/2	
	В		А		J

	<b>工</b>	۵	н <b>г</b>	m		0	
		Contact Layout				SQUARE FLANGE RECEPTACLE (TYP REAR MOUNTING	Panel Cuto
4		3#16					
	Ctc A B C	13-03   X Y   2.39 1.47   0 -2.79   -2.39 1.47					ØA
ယ							ØA ØAA R1 ØT
	_				[		
						SOURIAU shall not due to a use of the Specifications iss (professiona	the Products w
N							Count FR
						PN	I: 8D013
					A 14-1	D-2016 First Release	
					ISS D Designed By:	ATE Latest modification - Date:	by
					TITL	E	Aluminiur
<u> </u>					SCALE NA		General linear Tolerances: ±
					SOUR	AU WWW.S	OURIAU.(
					FORMAT A3		SOURIAL 8D013F
l	Н	G	F	E	D	С	

