

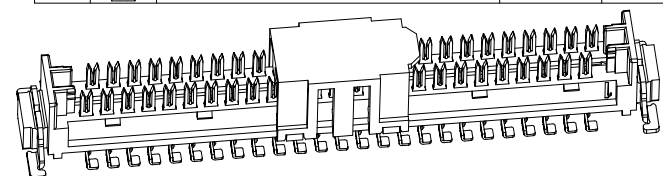


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2020.09.09	Wu Caixian
02	△2	依業務要求變更產品溫度敏感等級	2020.10.15	Feng Guodong
03	△3	增加機械防呆,調整主體容器的尺寸,帽子增加箭條及凸起標識(N=22G10)	2022.05.06	葉繼賓

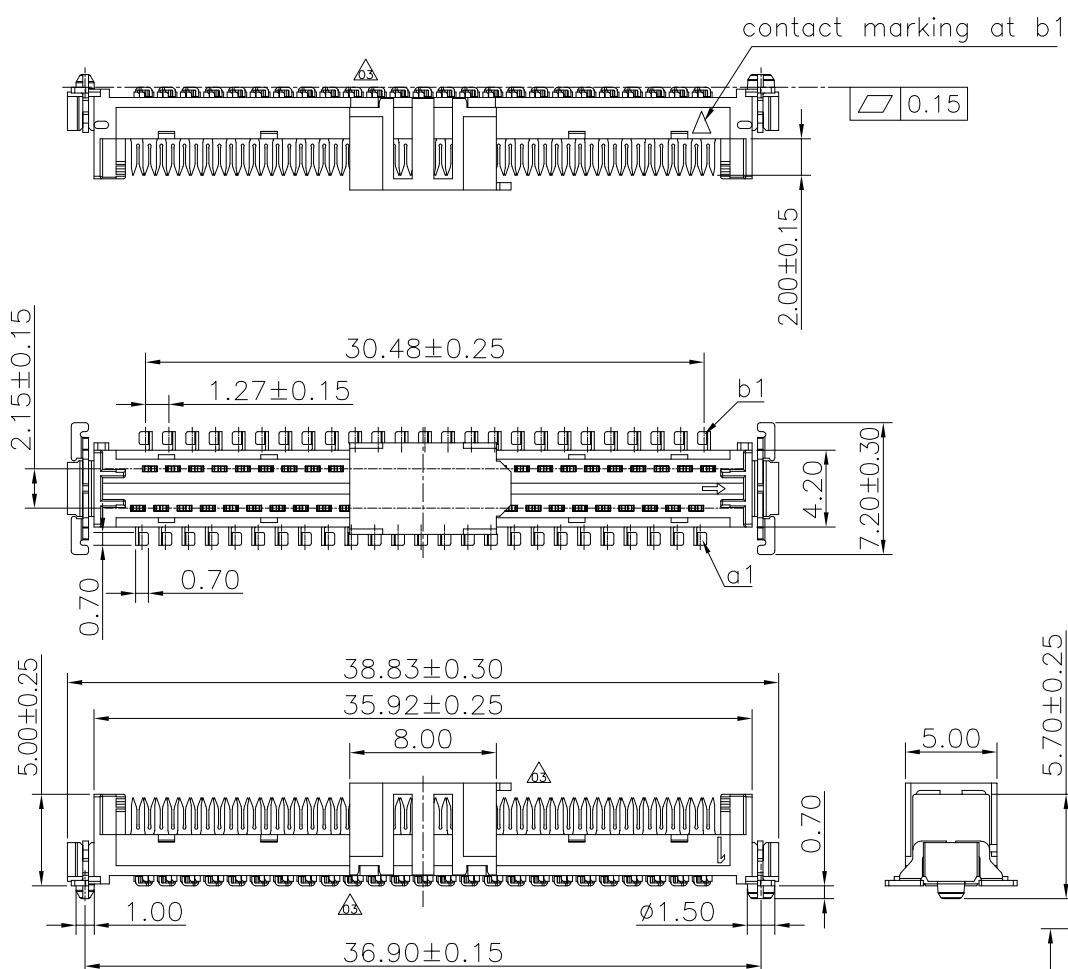

Specifications
 Current Rating:1.3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 △ Moisture sensitivity level: 1
 Operating Temperature:-55°C to +125°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

Recommended P.C.Board Layout
 (Tolerance:±0.05)

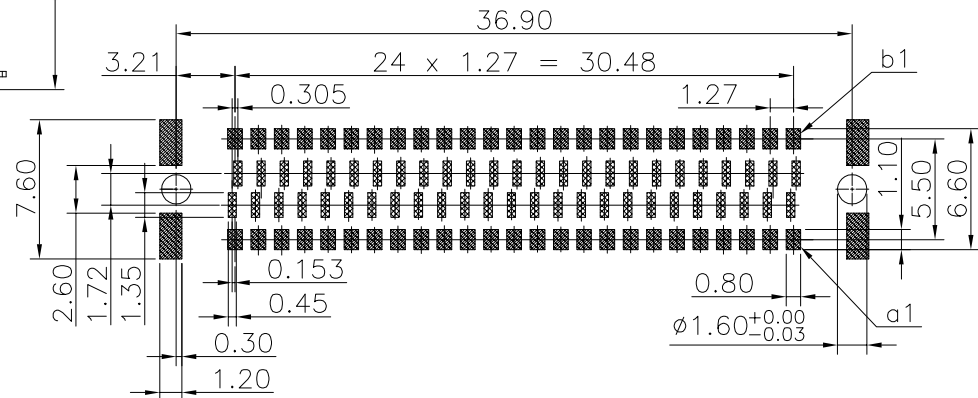

Ordering Information

G QEC201 - XX XX B 001 C X S X
 No. of Pins per Row: 25
 Standard Plating: 22=Matte Tin
 Color: 1=Black
 Standard Packing: F=CAP+Tape&Reel

 Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED: 葉繼賓	DATE: 2022.05.06	DWG. NO.	TITLE. 1.27 DRC board on IDC 50-polig50-contacts
		X.*±5.0°	X.±0.30	CHECKED: 張春進	DATE: 2022.05.06	PART NO.	
		.X.*±3.0°	.X±0.25	APPROVED: 邱國延	DATE: 2022.05.06	GQEC201-25XXB001C1SX	
REV. 03	UNIT. mm	SCALE. 1:1	PAGE. 1/1				