



PART NO. **RFD-43F-FBH**

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ADDED NOTE FOR O-RING	DM	3/6/20	JDMc

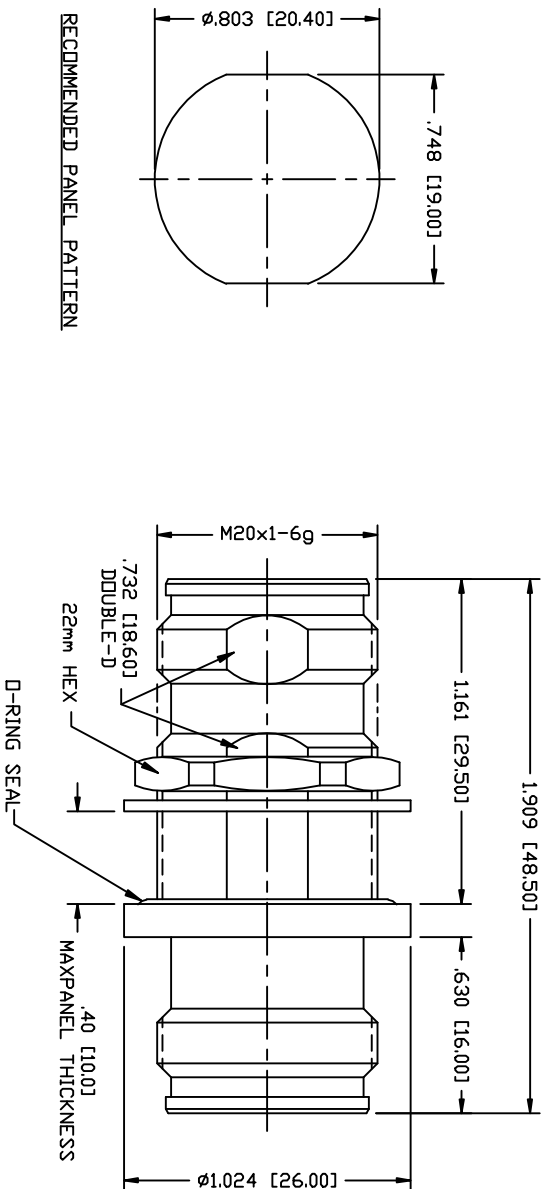

RECOMMENDED PANEL PATTERN

SPECIFICATIONS:

INTERFACE: IEC61169-54
 IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: DC-6 GHz
 VSWR MAX: <1.15:1 @ 3 GHz
 3rd ORDER IM: <-160 dBc @ 1900 MHz
 OPERATING TEMPERATURE: -40°C TO +155°C
 ROHS COMPLIANT

#	DESCRIPTION	QTY	MATERIAL	FINISH
5	PROTECTIVE CAP	2	PE	---
4	GROUND RING	2	PHOS. BRONZE	WHITE BRONZE
3	CONTACT	1	BaCu	SILVER
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	WHITE BRONZE

CUSTOMER
 OUTLINE DRAWING
 ALL DIMENSIONS
 ARE REFERENCE ONLY
 UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RF Industries
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6346 FAX
 7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340

**4.3-10 FEMALE TO 4.3/10 FEMALE
 PANEL MOUNT BULKHEAD**

SIZE: CABLE GROUP: DWG NO. REV:
 A N/A RFD-43F-FBH A

SCALE: NTS ENGINEERING ID: 000000 SHEET 1 OF 1

DESIGNED BY: D. McREYNOLDS
 CHECKED BY: C. ZUNIGA
 DATE: 3/6/20
 05/01/17