





POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300630037	C03001A48M020	30	2M +89-0MM (6'7"+3.50-0)
4	1300630135	C04001A48M020	25	2M +89-0MM (6'7"+3.50-0)

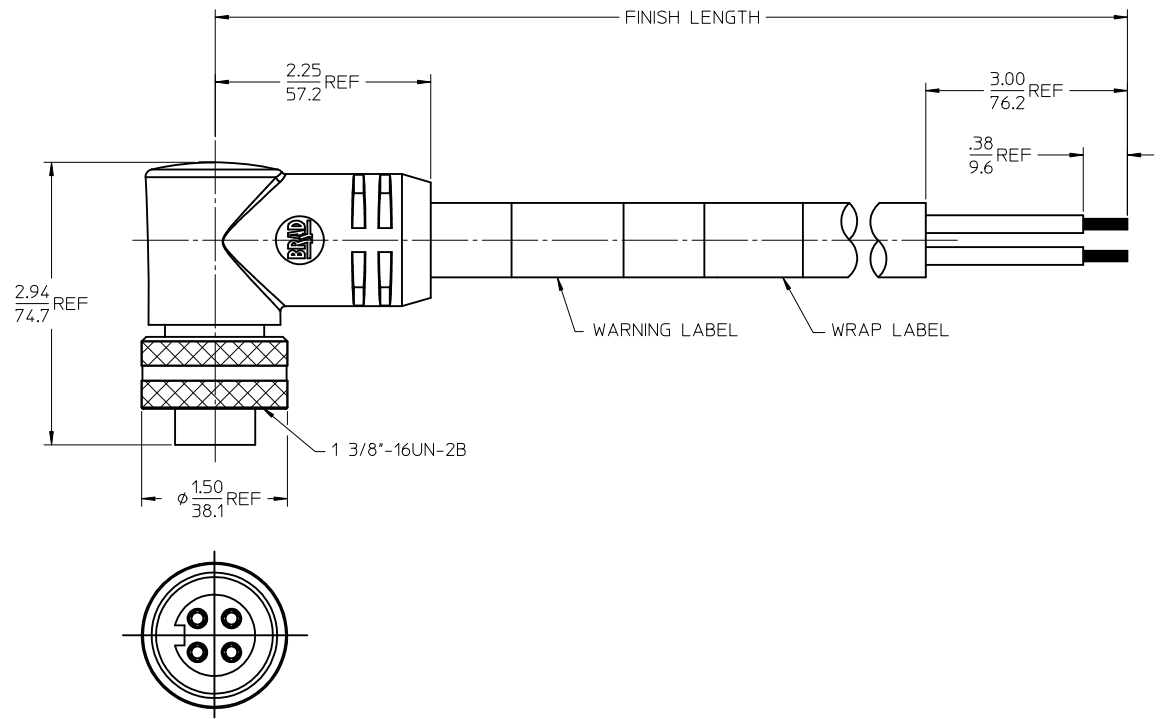

FACE VIEW-FEMALE INSERT
3 POLE 4 POLE

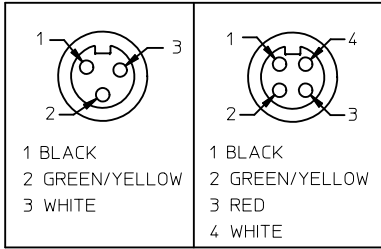

SPECS:
OVERMOLD: GRAY PVC
INSERT: BLACK PVC
COUPLING NUT: ANODIZED ALUMINUM
CABLE: #10AWG GRAY PVC
DUAL RATED UL TC/OPEN WIRING & STOOO
ELECTRICAL: 600V AC/DC

CREATE DOC EC NO: WNA2010-0435 DRWN:BRUPERT 2010/01/14 CHKD: 2010/01/15 APPR: JFMURPHY 2010/01/15	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0		mm	IN/MM	1:2	INCH	
	▽=0		INCH	DRAWN BY	DATE	TITLE	
			4 PLACES ± --- ± ---	B. RUPERT	01/12/2010	QUICK CHANGE	
	3 PLACES ± --- ± ---	CHECKED BY	DATE	FEMALE 90 DEGREE			
	2 PLACES ± --- ± ---	B. WOODMAN	01/12/2010	3 & 4 POLE PORTABLES			
	1 PLACE ± --- ± ---	APPROVED BY	DATE	MOLEX INCORPORATED			
	ANGULAR ±1/2°	JFMURPHY	2010/01/15				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO.	DOCUMENT NO.	SHEET NO.			
		SEE CHART	SD-130063-037	1 OF 1			
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					