

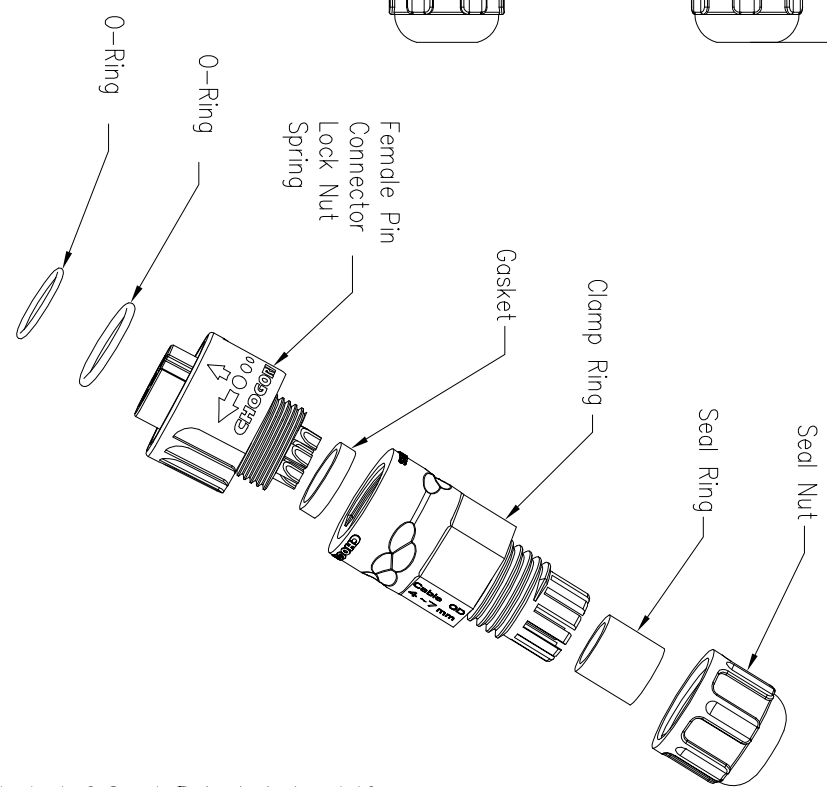
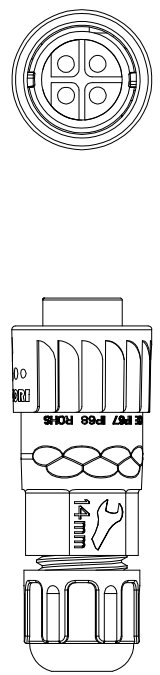



REV.	EN. NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13

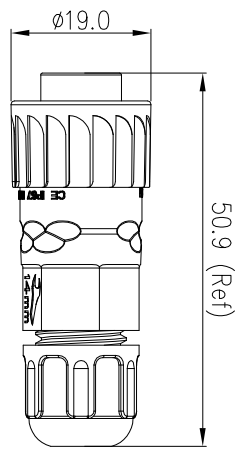


- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance: 100MΩ at DC500V.
 - 3.Contact Resistance: <10mΩ
 - 4.Withstand Voltage: 1500V AC
 - 5.Operating Current: 10A
 - 6.Operating Voltage: AC 125V
 7. Waterproof Rate: IP67 (Mated)
 8. Seal Nut: Nylon, Black
 9. Seal Ring: Silicon, Black
 10. Clamp Ring: Nylon, Black
 11. Gasket: Silicon, Red
 12. Female Pin: Copper Alloy, Gold Plated
 13. Connector: Nylon+GF, Black
 14. Lock Nut: Nylon, Orange
 15. Spring: SUS
 16. O-Ring: Silicon, Red
 17. RoHS Compliant.
 18. UL Compliant.
 19. Cable Range OD: φ3.5mm~φ6.8mm
 20. Mating Cap: 804-00009-00

22XXX231-01

Pin Number



4 Pin
P/N: 22004231-01
Pin Assignments
Front View



UNIT: mm
TOLERANCE
X ±0.25
XX ±0.15
XXX ±0.05
ANGLES ±1°

DESCRIPTION

Standard Series Push Lock
Male Plug With Female Pin

SCALE	SIZE	SHEET	OF
1:1	A4	1	1

REV: C1 * : Inspection Item

CHOGORI

PART NO 22XXX231-01

DRAWN BY Liu

DATE 2019/08/13

DWG NO

CHECKED BY Mo

DATE 2019/08/13

CUSTOMER

APPROVED BY Panson

DATE 2019/08/13