




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

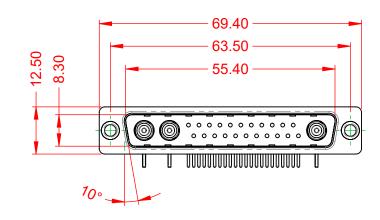




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING: 50Ω (IMPEDANCE)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.INSULATOR RESISTANCE: $5000M\Omega$ min.DIELECTRICDIELECTRIC

1000V AC rms

-55°C ~ 125°C



			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
EDAC INC	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-25W	3640-5T1	ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-25W	3640-5T1	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

