

I I I I I I I I I I I I I I I I I I I	G	I II I	m	0



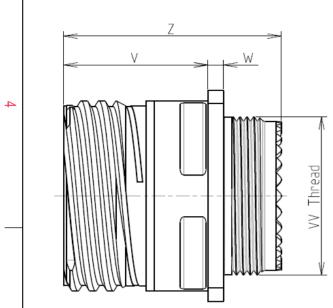

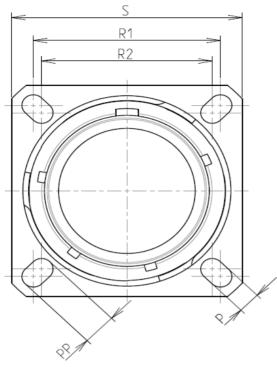

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

 \mathbf{N}

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet : Gold over copper Alloy 0.8µm -Contact Plating : 500 Mating cycles -Durability -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

8D 0

G

-

н т	п		0	σ	A]
R1 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2 R2			Layout short	WN AS EXAMPLE		4
Keying Shown as exa	Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 23.01 R2 20.62 S 28.6±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max		the Specifications issued by	ducts which does not con either of the Parties or by nmendation, technical no	nply with y a third party	2
<u>vv</u>	THREAD M18x1-6g	ISS DATE	PN: 8E First Release Latest modification - by	0013S03SC		MOD N°
- 13 S 03 S C		Designed By: Date: CUSTOMER DRAWING TITLE Stainless Steel Receptacle 8D series SCALE General linear NPRDS / PROJECT NA Tolerances: 859				
	ORIENTATION : C CONTACT TYPE : SOCKET(500 Matings) CONTACT LAYOUT : 13-03	FORMAT A3		IAU.COM RIAU DRG N° D13S03SC-C B	This document is the prop SOURIAU it must not be reproduce communicated without per	ed or

Contact Layout		anel Cuto		
SQUARE FLANG REI 3#16	GE RECEPTACLE (TYPE 0)			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	ØA Ø	<u>51</u>		
	ØA ØAA R1 ØT			
	SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommenda			
	Count FR			
	PN: 81	D013		
A 15-10-2016 First Re	lease			
ISS DATE Lates Designed By:	st modification - by Date:			
TITLE	Stainl	less St		
SCALE	Tolei	ral linear rances: ±		
SOURIAU	WWW.SOUF	RIAU.(
FORMAT A3	SOU 8D	IRIAU 0135		
H G F E D	C			

