


a YAGEO company

## C870CF25180AA0J

C87, Film, Film/Foil Polypropylene, Motor Run, 18 uF, 5%, 470 VAC

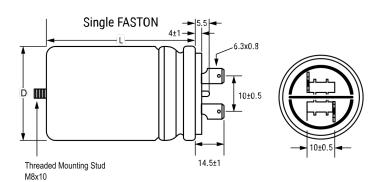

General Information Series C87 Dielectric Film/Foil Polypropylene Style Description Aluminum Case, Plastic Cover, Spun Seal Features Spun Seal, Safety Class S2, UL\_94 V0 Disk RoHS Yes Lead Fast On (1+1) UL, VDE, CQC, CSA (600VAC), UL\_94 V0 Qualifications Disk AEC-Q200 No Component 103 g Weight

Click here for the 3D model.

**Packaging Quantity** 

Dimensions	
D	40mm +1mm
L	78mm +/-2mm

Packaging Specifications		
Mounting	Bolt - M8x10	
Packaging	Bulk Bag	

62

Specifications			
Capacitance	18 uF		
Capacitance Tolerance	5%		
Voltage AC	470 VAC		
Temperature Range	-25/+85°C		
Rated Temperature	85°C		
Max dV/dt	15 V/us		

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.