


| | | | | |
|-----|-------|-------------|----------|------|
| Rev | AWO # | Description | Date | Appr |
| - | | RELEASED | 04/04/05 | |

APPROVED: _____
 DATE: _____ TITLE: _____

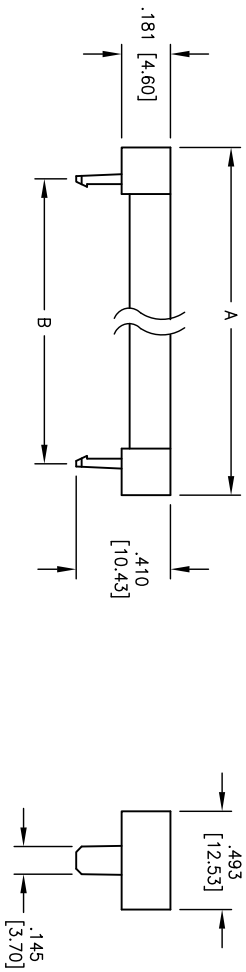

| DSR-XX | NO. OF CONTACTS | DIMENSION | |
|--------|-----------------|---------------|---------------|
| | | A | B |
| DSR-09 | 9 | .885 [22.48] | .630 [16.00] |
| DSR-15 | 15 | 1.212 [30.78] | .943 [23.95] |
| DSR-25 | 25 | 1.754 [44.55] | 1.437 [36.50] |
| DSR-37 | 37 | 2.414 [61.32] | 2.033 [51.64] |

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES. [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLS

| | | | |
|------|--------|--------|--------|
| .X | ± .10 | Ø.X | ± .10 |
| .XX | ± .020 | Ø.XXX | ± .015 |
| .XXX | ± .015 | Ø.XXXX | ± .010 |

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STRAIN RELIEF, DSR SERIES IDC D-SUBS
 9, 15, 25 & 37 POSITION

| | | | |
|----------|------------|--------------|----------|
| DRAWN | SS | DATE | 04/04/05 |
| CHECKED | | | |
| APPROVED | | | |
| SIZE | PART NO. | REV. | |
| X | DSR-XX | - | |
| REF: | SCALE: NTS | SHEET 1 OF 1 | |