



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00027	Connector, dc jack, 5.5x2.5xL17.4 mm, molding style	1	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00004	Overmold, PVC	1	black

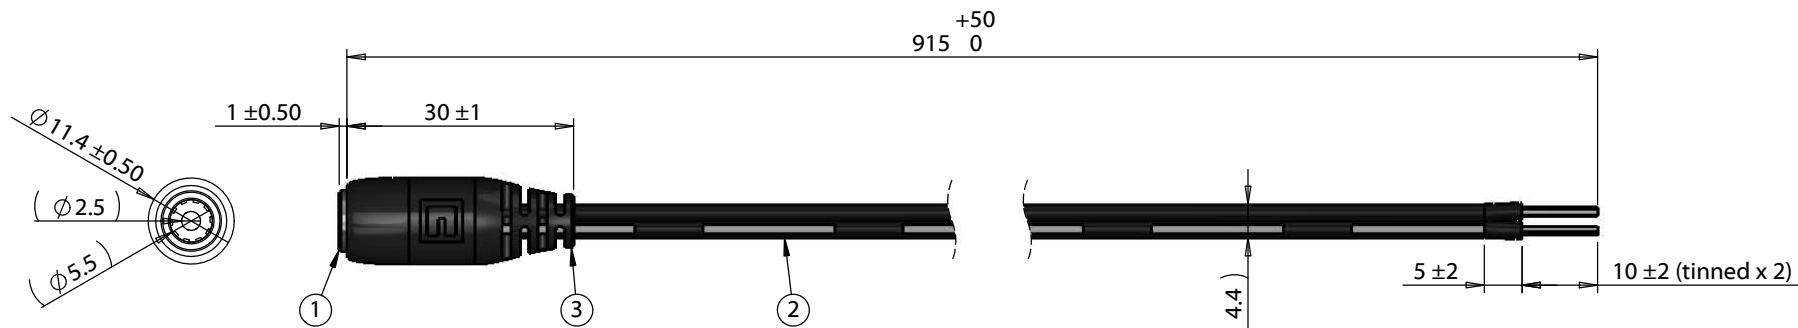

Notes:
Functionally equivalent components may be substituted
Electrical requirements: 7 A , 48 Vdc

Wiring Diagram	
50-00027	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	06/27/2012	Initial release	GL <small>Digitally signed by GL Date: 2018.02.08 09:35:10 -08'00'</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	Size:
			AG <small>Digitally signed by AG Date: 2018.02.08 13:34:38 -08'00'</small>	Description:	Part number:
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 915 mm, 5.5x2.5 mm 50-00027 dc jack to stripped tinned, 18 AWG, 30-00007 wire	A 10-01094
					Scale: 1:1
					 Sheet 1 of 1

5

4

3

2

1