
**Mounting Option** 


02-.128 (3.25) Dia. Mounting Holes

## **Contact Detail**


500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

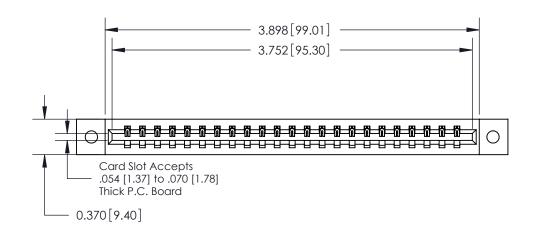

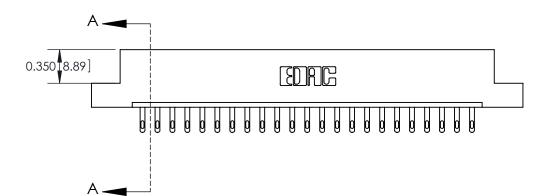





## **See Accompanying Pages for:**

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**

837 Series High Temp Card Edge Connector Part Number: 887-023-500-102



|   | ACAD REFERENCE NO | 837 ENG MASTER   |
|---|-------------------|------------------|
|   | DRAWN: J.LEE      | DATE: OCT. 06/09 |
|   | CHECKED:          | DATE:            |
|   | SCALE: NTS        | SHEET 1 OF 4     |
| ) | DRAWING NUMBER    | ISSUE            |

837 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER

ISSUE NUMBE

ORIGINAL

1



| 837 Series High Temp Card I          | ACAD REFERENCE NO. 837 ENG MASTER   |                |                  |        |
|--------------------------------------|---|----------------|------------------|--------|
| Contact Bend Detail                  |   | DRAWN: J.LEE   | DATE: OCT. 06/09 |        |
|                                      |   | CHECKED:       | DATE:            |        |
| EDAC INC                             | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: NTS     | SHEET :          | 2 OF 4 |
| TORONTO, ONTARIO                     |   | DRAWING NUMBER | •                | ISSUE  |
| YOUR CONNECTION TO QUALITY & SERVICE |   | 837 Assembly   |                  | 1      |





## **Features**

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

|  | 837 Series High Temp Card I          | gh Temp Card Edge Connector   |          | ACAD REFERENCE NO. 837 ENG MASTER |          |           |  |
|--|--------------------------------------|---|----------|-----------------------------------|----------|-----------|--|
|  | Features and Specifications          |   | DRAWN:   | J.LEE                             | DATE: OC | CT. 06/09 |  |
|  |                                      |   | CHECKED: |                                   | DATE:    |           |  |
|  | COOO EDAC INC                        | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE:   | NTS                               | SHEET .  | 4 OF 4    |  |
|  | TORONTO, ONTARIO                     |   | DRAWING  | NUMBER                            |          | ISSUE     |  |
|  | YOUR CONNECTION TO QUALITY & SERVICE |   | 8        | 37 Assembly                       |          | 1         |  |