





ISSUE NUMBER	
ORIGINAL	1

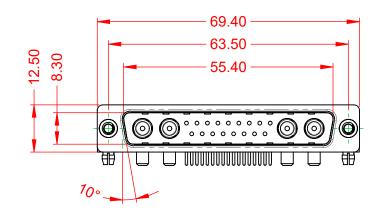




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10m0 MAX
SIGNAL CONTACT RESISTANCE:	
INSULATOR RESISTANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05



	COMBINATION D-SUB			SW REFERENCE NO.: 629 COMBO ASSEMBLY					
				DRAWN: C.B		DATE: JAN. 01/2019		019	
			CHECKED:		DATE:				
	EDAC INC TORONTO, ONTARIO CANADA	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE:	(IN C.A.D. 1:	1)	SHEET	1 OF	2	
			DRAWING NUMBER: 629-21W		V4640-3TB		ISSUE		
YOU			PART NUM	IBER:	629-21W4	640-3TB		1	

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

		EDAC INC
		TORONTO, ON
		CANADA
YOUR CO	DNNECTIC	ON TO QUALITY & SER

