

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

> 10.70 5.80

THIS IS A C.A.D. GENERATED DRAWING

DO NOT MAKE MANUAL REVISIONS TO MASTER.

20.33 10.67 ۲ ۲ \bigcirc \bigcirc

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

Ν	0	ΤE	S:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED

OPERATING TEMPERATURE:

POWER/CO-AX CONTACT RATING: 40A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:




		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19		
		CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-8W8-650-4N3		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-8W8-	650-4N3	1	

-55°C ~ 125°C

5000MΩ min.

1000V AC rms

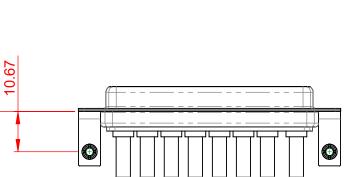

ISSUE NUMBER

ORIGINAL

(1)

