

# PCM 175/175 XT

---

Sample image

**Order symbol:** PCM 175/175 XT

**Product nbr:** 6016943

**Description:** Enclosure. PC



**Remarks:** Smoked transparent cover

**EAN:** 6418074011886

**El. number:**

- Finland:
- Denmark:
- Sweden:

**Including:** Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

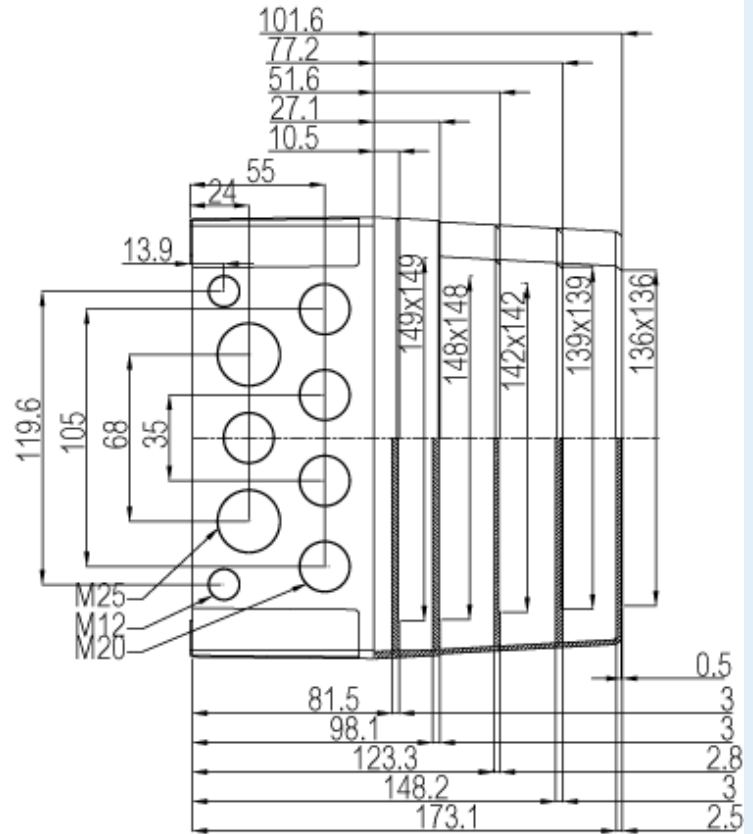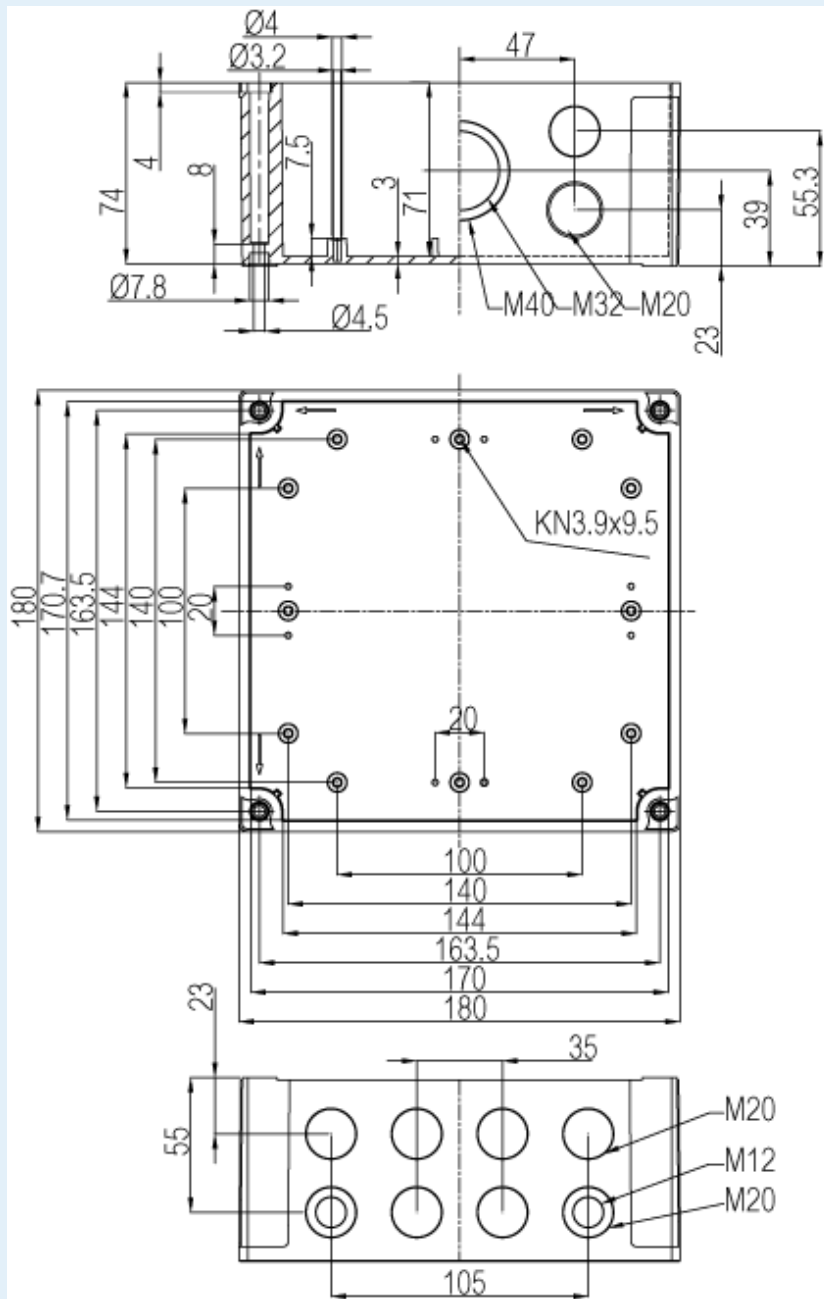

**Dimensions:**                      **Height**                      **Width**                      **Depth**

mm:	180	180	175
inch:	7.09	7.09	6.89

**Materials:**

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover colour:	Clear transparent
Gasket material:	Polyurethane

**Temperatures:**

Temperature °C (short term)::	-40 ... 120
Temperature °C (continuous):	-40 ... 80
Temperature °F (short term):	-40 ... 250

**Accessories:**

MIV 175	Back Panel (Galvanized steel). for enclosures: (148 x 148 x 1)
FP A 175/180	Front panel (Aluminum). for enclosures: (170 x 162 x 1)
HFP 180	Front panel hinge series
MIN 15	DIN-15 Mounting rail. for enclosures: (150 x 15 x 1)
MIV 15	DIN-35 Mounting rail. for enclosures: (150 x 35 x 1)
FP 22046	Mounting foot kit (4 pcs)

**Rating:**

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
Electrical insulation:	Totally insulated

Temperature °F (continuous): -40 ... 175

Halogen free (DIN/VDE 0472, Part 815): 1

UV resistance: UL 508

Flammability Rating: UL 746C 5"

Glow Wire Test (IEC 695-2-1) °C: 960 °C

NEMA Class

**Certificates:**

Certificate FI 40847