



(1)

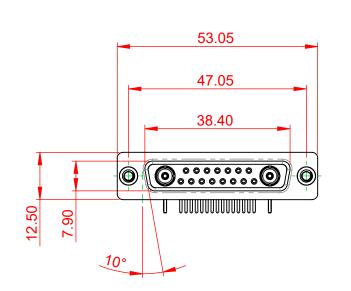



NOTES:


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATED **OPERATING TEMPERATURE:** -55°C ~ 125°C POWER/CO-AX CONTACT RATING: 50Ω (IMPEDANCE) (IF PRESENT)

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE:


.XX ±0.13

.XXX ±0.05



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
COMBINATION			DATE: JAN. 01/2019			
			DATE:			
EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
		DRAWING NUMBER: 630-17W2640-5T2		ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-17W2	2640-5T2	1		

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

	×	\geq

