

<b>T</b>	G	нт. П	m	0



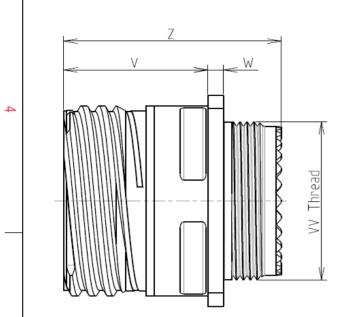



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-9	Shell Material	: Stainless Steel			
-9	Shell Plating	: Nickel			
-	Insulator	: Thermoplastic			
- (	Contacts	: Copper Alloy			
-9	Seals & Grommet	: Silicon Elastomer			
- (	Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-	Durability	: 500 Mating cycles			
-	-Delivered with Souriau contacts and Accessories				
-	Temperature Range	: -65°C to +200°C			
	Salt Spray	: 500 hours			

: 38.32 g ± 10%

8D 0

G

13

S

08

Ρ

F


Е

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

CONTACT TYPE : PIN(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

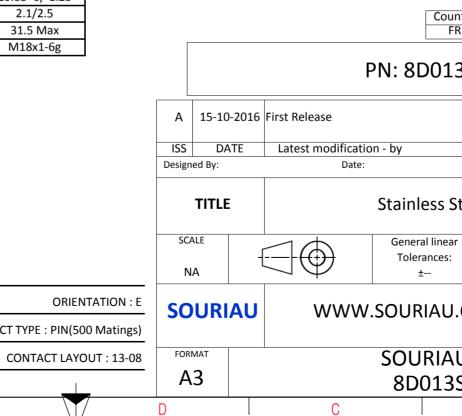

σ		A			
				4	
AS EXAMPLE				3	
r any non-conformits which does not co er of the Parties or b ndation, technical n untry Jurisc FR 3SO8PE	mply with by a third part			2	
	CUSTOME	R DRAWING	MOD N°		
Steel Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
I.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1	
AU DRG N° SO8PE-C			SHEET		
B		A		J	

	τ	م	г	m		0	
		Contact Layout					Panel Cutout
4	3	$X \begin{pmatrix} G \\ G \\ F \end{pmatrix} \stackrel{\bigoplus}{\rightarrow} H \\ F \stackrel{\bigoplus}{\rightarrow} G \\ F \stackrel{\bigoplus}{\rightarrow} G \\ F \stackrel{\bigoplus}{\rightarrow} G \\ F \\ F \stackrel{\bigoplus}{\rightarrow} G \\ F \\$			2 A	QUARE FLANGE RECEPTACLE (TYPERAR MOUNTING	-ε ο)
		Contacts (Insert arrangement 13-8)    ntact ID  Contact location    ID  X-axis (mm)  (mm)    A  +.065 (1.65)  +.157 (3.99)    B  +.170 (4.32)  +.000 (0.00)    C  +.120 (3.05) 120 (3.05)    D 000 (0.00) 170 (4.32)    E 120 (3.05) 120 (3.05)    F 170 (4.32)  +.000 (0.00)    G 065 (1.65)  +.157 (3.99)    H  +.000 (0.00)  +.044 (1.12)			₹		ØT.
ω	size no. co	umber of Size Service Contact Supersed ontacts contacts rating location 8 20 I All MS20051					Dim ØA ØAA R1 ØT
	_					SOURIAU shall no	t be liable for any
						due to a use of the Specifications is	the Products whi sued by either of al recommendati
S						PI	Country FR N: 8D013S
					A 15-10-201 ISS DATE Designed By:	6 First Release Latest modification Date:	- by
					SCALE		General linear Tolerances:
<u> </u>					SOURIAU	WWW.S	±
					FORMAT A3		SOURIAU 8D013SC
	Н	G	F	E	D	С	

