



Electrical Specifications

Reject Band: 2110-2170 MHz
Reject Attenuation: 30 dB Min
Passband: 800-2095 & 2185-2700 MHz
Passband Loss: 1.5 dB Max @ 800-2075 MHz
 1.5 dB Max @ 2205-2700 MHz
 2.5 dB Max @ 2075-2095 MHz
 2.5 dB Max @ 2185-2205 MHz
Return Loss in Passband: 14 dB Min
VSWR: 1.5:1 Max


Mechanical

Connector Type: SMA (F)
Dimensions: 9.84 x 2.36 x 1.57 Inches

Environmental

Operating Temperature: -40 to +40° C

Outline Drawing:

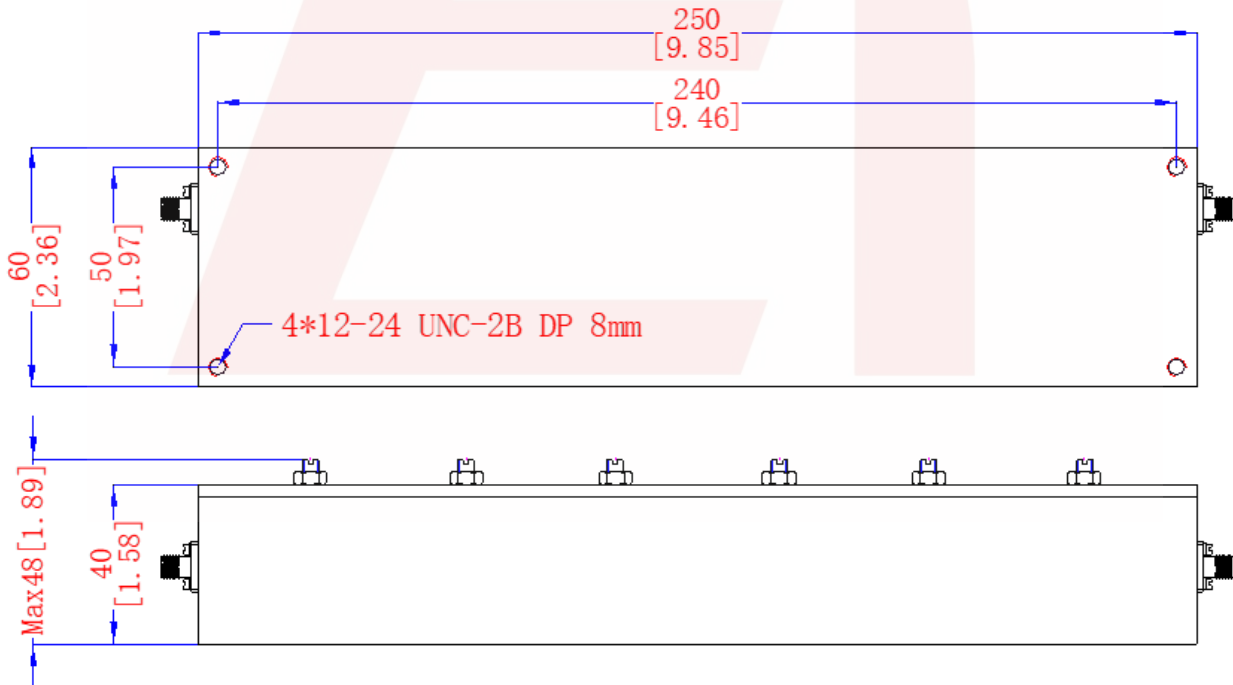



Response Plot:

